

02-23-00

A

Case Docket No. FUJX 17.079
Filed by Express Mail
(Receipt No. EL522353697US)
on February 22, 2000
pursuant to 37 CFR 1.10
by Lydia Gonzalez

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

S I R:

Transmitted herewith for filing is: ☒ a new application
☐ a c-i-p application of S.N. _____ filed _____

Inventor(s): Nobuhisa AOKI; Makoto UCHISHIMA; Hiroaki IWAMOTO

For: RADIO TERMINAL EQUIPMENT

Enclosed are:

- ☒ 13 sheets of drawings.(Figs. 1-13)
- ☒ Specification, including claims and abstract (47 pages)
- ☒ Declaration
- ☒ An assignment of the Invention to FUJITSU LIMITED
- ☒ A certified copy of Japanese Application No. 11-124398
- ☒ An associate power of attorney
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Post card
- ☒ Recording fee (as indicated below)
- ☐ Information Disclosure Statement, PTO-1449, copies of ____references
- ☐ Other _____
- ☐ Other _____

jc564 U.S. PTO
09/510074
02/22/00

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	32-20 =	12
INDEP CLAIMS	1-3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
x 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$216
x 78 =	\$
x 260 =	\$
TOTAL	\$906


☐ Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)

☒ A check in the amount of \$946.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

Respectfully Submitted,

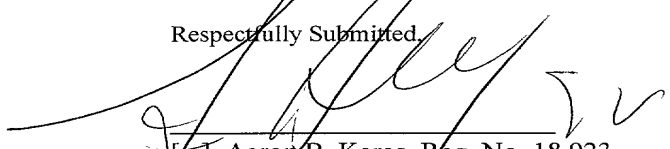

- ☒ Aaron B. Karas, Reg. No. 18,923
- ☒ Samson Helfgott, Reg. No. 23,072
- ☐ Leonard Cooper, Reg. No. 27, 625
- ☐ Linda S. Chan, Reg. No. 42,400
- ☐ Jacqueline M. Steady, Reg. No. 44,354
- ☐ Harris A. Wolin, Reg. No. 39,432

Date: February 22, 2000

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

jc639 U.S. PTO
02/22/00

09510074-022200

Radio Terminal Equipment

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

5 The present invention relates, in a radio transmission system, to a radio terminal equipment for receiving radio waves concurrently reached from a plurality of radio stations to process the radio waves under a procedure of channel controls.

2. DESCRIPTION OF THE RELATED ART

10 The CDMA (Code Division Multiple Access) system is a multiple access system which essentially has confidentiality and an interference resistibility, and is capable of suppressing a cochannel interference and reusing a radio frequency efficiently. In addition, the CDMA system is
15 positively being applied to a mobile communication system recently due to the fact that the establishment of technology for realizing the transmitting power control with high accuracy and high response has enabled flexible control of the radio transmission characteristics by the sector zone.

20 Fig. 9 is a diagram showing an example of a configuration example of a mobile communication system to which the CDMA system is applied.

 In Fig. 9, two radio base stations (BTS) 71-1 and 71-2 are connected through a not-shown communication link to form
25 wireless zones 72-1 and 72-2, respectively. A mobile station (MS) 73-1 is located in the overlapping region of the wireless zones 72-1 and 72-2, and mobile stations (MS) 73-2 to 73-4 are located in the region of the wireless zone 72-2, where the wireless zone 72-1 is not overlapped.

30 Fig. 10 is a diagram showing a configuration of the mobile station.

 In Fig. 10, the mobile station 73-1 is composed of: an antenna 81-1; an antenna interface part 82-1 having an antenna terminal connected with the feeding point of the antenna 81-1;
35 a transmission information generating part 83-1 fed with the "upward transmission information" to be transmitted to the radio base stations 71-1 and 71-2; a spreading part 84-1, an

orthogonal modulation part 85-1 and a transmission part 86-1 connected in tandem between the output of the transmission information generating part 83-1 and the input of the antenna interface part 82-1; a receiving part 87-1, an orthogonal demodulation part 88-1 and a despreading part 89-1 connected in tandem with the output of the antenna interface part 82-1; a demodulating part 90-1 disposed at a subsequent stage of the despreading part 89-1 for outputting downward transmission information; a receiving timing detecting part (RTDP) 91-1 connected together with the despreading part 89-1 directly with the output of the orthogonal demodulation part 88-1; a CDMA controlling part 92-1 connected in tandem with the receiving timing detecting part 91-1 and having one output connected with one control input of the spreading part 84-1; and a receiving signal processing part 93-1 having: a first input connected with the control input of the despreading part 89-1 and the other output of the CDMA controlling part 92-1; second and third inputs connected with the outputs of the despreading part 89-1 and the demodulating part 90-1, respectively; a fourth input connected with the input of the CDMA controlling part 92-1 and the output of the receiving timing detecting part 91-1; and four outputs connected individually with the control inputs of the transmission information generating part 83-1, the orthogonal modulation part 85-1 and the transmission part 86-1 and the other control input of the spreading part 84-1.

Here, the configurations of the mobile stations 73-2 to 73-4 are identical to that of the mobile station 73-1. In the following, therefore, the corresponding components will be designated to the common reference numerals subscribed by the suffixes "2" to "4", and their description and illustration will be omitted.

In the mobile communication system thus configured, the radio base stations 71-1 and 71-2 transmit the transmission wave signals P1 and P2, as modulated in the series of the following frames (hereinafter referred to as the "downward frames"), as shown in Fig. 11(1) and (2), individually to

specific radio channels:

Frames containing not only frame numbers SFN having values to be sequentially updated recyclically to "0", "1", - - -, "36863", "0", - - - but also broadcasting information and other control information to be applied for the channel control; and

Frames having a constant word length.

Here, the aforementioned word length is assumed to be 10 milliseconds (as will be expressed by the "frame length TF") under a predetermined transmission speed.

In the following, on the other hand, the aforementioned transmission wave signals P1 and P2 and specific radio channels will be called the "broadcasting signal" and the "control channel", respectively.

It is further assumed for simplicity that the "broadcasting signal" be transmitted with a specific transmission power by the radio base stations 71-1 and 71-2 but not an object of the later-described transmission power control.

Moreover, it will be assumed for simplicity that the aforementioned specific radio channel be the "perch channel" which is acquired either by the mobile stations located at the wireless zones 72-1 and 72-2 on the basis of the procedure prescribed for the system or as the information contained in the broadcasting signal.

In the mobile station 73-1, on the other hand, even for the period for which a completed call of the local station remain existing and for which speech signals or the like are transmitted/received through any radio channel formed between the mobile station 73-1 and the radio base station 71-1, for example, the receiving part 87-1 transforms the broadcasting signal P2 (Fig. 11(3)) having reached to the antenna 81-1 from the radio base station 71-2 and given through the antenna interface part 82-1 into a predetermined intermediate frequency signal.

Here, the associated operations of the individual parts concerned with the aforementioned transmission/reception of

the speech signal have no relation to the invention, and their detailed description will be omitted.

5 The orthogonal demodulation part 88-1 generates two baseband signals orthogonal in the baseband region by demodulating the intermediate frequency signal orthogonally. The despreading part 89-1 despreads those baseband signals in accordance with a predetermined despreading code. The demodulating part 90-1 recovers the "downward transmission information" by demodulating the signal, which has been
10 despread to the transmission band in the despreading procedure. On the other hand, the receiving timing detecting part 91-1 reproduces the aforementioned frame series.

15 The receiving signal processing part 93-1 synchronizes with the frames contained in that "downward transmission information" and extracts the frame numbers SFN contained individually in those frames. Moreover, the receiving signal processing part 93-1 calculates the difference between the current time and the time at which the SFN is at "0", based on the frame numbers SFN thus extracted, and acquires and holds
20 the point t_0 of the beginning of a frame having the SFN "0".

On the other hand, the CDMA controlling part 92-1 leads the channel controlling processing to control the operations of the despreading part 89-1 and the spreading part 84-1 under the channeling control and to control the operations of the
25 transmission information generating part 83-1, the spreading part 84-1, the orthogonal modulation part 85-1 and the transmission part 86-1 in association with the receiving signal processing part 93-1.

Of the items relating to such channel control, here will
30 be omitted the description of the item having no relation to the invention.

Further, the processings to be done in the transmission information generating part 83-1, the spreading part 84, the orthogonal modulation part 85-1 and the transmission part 86-1
35 are individually reversible ones with respect to the aforementioned processings which are done in the demodulating part 90-1, the despreading part 89-1, the orthogonal

demodulation part 88-1 and the receiving part 87-1, and their detailed description will be omitted.

The CDMA controlling part 92-1 suitably transmits a transmission signal TX1 modulated with the series of the frame (hereinafter referred to as the "upward frames") containing a later-described timing compensation value TDHO, as shown in Fig. 11(4), for the period while the local station is located in the region where the wireless zone 72-1 and the wireless zone 72-2 overlap and while the aforementioned completed call exists.

Here, the timing compensation value TDHO is given by the following formula for a point t_t , at which the transmission of the frames containing the SFN "0" as the aforementioned transmission signal TX1 is started, and the aforementioned point t_0 :

$$TDHO = t_t - t_0.$$

Here, the detail of the processing for the CDMA controlling part 92-1 to decide the instant at which such transmission signal TX1 is to be transmitted is omitted for simplicity and will be described hereinafter.

Further, the aforementioned downward frames and upward frames are configured, actually, as a series of time slots in a manner that the corresponding frame is divided into sixteen according to a predetermined form, as shown in Fig. 12. Here in the following, the individual time slots composing the downward frame will be called the "downward slots", and the individual time slots composing the upward frame will be called the "upward slots".

Here, the timing compensation value TDHO, as expressed by the aforementioned formula, signifies "the phase difference between the broadcasting signal P2 having reached the mobile station 73-1 from the radio base station 71-2 and the aforementioned transmission signal TX1" on a time axis.

Therefore, the phase difference that is the sum between the phase difference, corresponding to the difference propagation between a delay time D1 of the radio transmission line from the radio base station 71-2 to the mobile station

73-1 and a delay time D2 of the radio transmission line from the radio base station 71-2 to that mobile station 73-1, and the phase difference of the transmission waves of the radio base stations 71-1 and 71-2 is given by the following formula,
5 when a difference d of the phases on the time axis of the frames to be transmitted in an up link (leading from the mobile station 73-1 to the radio base stations 71-1 and 71-2) and a down link (leading from the radio base stations 71-1 and 71-2 to the mobile station 73-1) on those radio transmission lines is
10 known:

$$\delta = \text{TDHO} - d.$$

Here, it is assumed for simplicity that the aforementioned phase difference d be at a value of "1,024" times of the chip rate.

15 The radio base station 71-1 receives the aforementioned transmission signal TX1, and extracts, the timing compensation value TDHO contained in the transmission signal TX1, for the period while the soft hand-over is to be performed on the corresponding completed call, to inform the radio base station
20 71-2 the timing compensation value TDHO (containing the corresponding call identification information) through the aforementioned communication link.

For the call which is given such timing compensation value TDHO through the communication link, the radio base
25 station 71-2 maintains the orthogonality of the spreading code to be applied for transmitting, by round the deviation of the phase signified by that timing compensation value TDHO, in the accuracy of the unit period of the symbol. Moreover, the radio base station 71-2 sets, at a point in time when the
30 aforementioned phase difference δ is suppressed in the accuracy of the timing compensation value TDHO (nearly equal to TDHO) obtained as a result of the rounding, the phase (or a point in time at which the transmission is to be started) of the frames to be subsequently sent to the radio channel to
35 be applied for the soft hand-over.

Therefore, to the mobile station 73-1, frames (or time slots) of the speech signal reach almost concurrently from the

two radio base stations 71-1 and 71-2 in with a deviation less than the aforementioned symbol period on the time axis as shown in Figs. 13 (1) and (2).

5 In the mobile station 73-1, the receiving part 87-1, the orthogonal demodulation part 88-1, the despreading part 89-1, the demodulation part 90-1 and the receiving signal processing part 93-1 receive the frames that concurrently reach in parallel under the control of the CDMA controlling part 92-1.

10 In the mobile station 73-1, the receiving timing detecting part 91-1 detects the field strength level of the downward slots, which are received from the radio base stations 71-1 and 71-2, as described above, and decides the specific reference point according to a predetermined algorithm. The CDMA controlling part 92-1 specifies the point in time, which
15 is determined relative to the reference point, as the transmission point.

Here, the procedure and an operand of the operations to be done for thus determining the transmission point are not the feature of the invention, and a variety of known techniques
20 can be applied thereto so that their description will be omitted.

Moreover, the CDMA controlling part 92-1 starts, in association with the receiving signal processing part 93-1 and the spreading part 84-1, the transmissions of the upward slots
25 (or frames) containing both or either of the speech signals to be transmitted to the radio base station 71-1 and 71-2 and any control information concerned with channel control of the corresponding call, at that transmission point, and feeds the transmission part 86-1 with the level suited for the value of
30 the TPC bit contained in any downward slot (or frame) received in advance, thereby to control the transmission power necessary for solving the near-far problem intrinsic to the CDMA system.

Here in the aforementioned prior art, the transmission
35 characteristics of the radio transmission line to be formed between the radio base stations 71-1 and 71-2 and the mobile station 73-1 generally vary every moment in accordance with

the movement of the mobile station 73-1 and the location and the shape of the landform and planimetry intervening on the radio transmission line, and a multipath is formed. Nevertheless, the transmission point is determined relative to the reference point which was determined on the basis of the aforementioned algorithm.

When those transmission characteristics of the radio transmission line have an allowably low fluctuation, therefore, the transmission power is controlled stably and highly accurately on the basis of the aforementioned TPC bits, and a sufficient throughput is stably retained for the processing of the channel control to be made in the radio base stations 71-1 and 71-2.

In the state where the fluctuation of the transmission characteristics of the radio transmission line is serious, on the contrary, the transmission point is determined with reference to the reference point which is determined on the basis of the aforementioned algorithm, even if the downward slots that have reached in advance are received. In both or either of the radio base stations 71-1 and 71-2, it may be impossible to retain the throughput which is required for the processing to be completed before any downward slot is subsequently transmitted.

Even when the downward slot reaching after that reference point is received, on the other hand, it may be impossible that a sufficient throughput necessary for the processing of the channel control is retained for the upward slot.

Moreover, the state where the throughput is short is generally made the more liable to occur when the symbol rate is set to the smaller value.

In the prior art, therefore, it is highly probable that the effective utilization of the radio frequency suited for the amount of the transmission information to be transmitted is blocked, or that a restriction is imposed on the design of the system suited for the zone configuration, the channel allocation and another combination.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a radio terminal equipment which is flexibly adapted to various configurations of a system and which enables a highly reliable
5 channel control and favorable transmission quality.

A further object of the present invention is to perform the channel control more stably and reliably than the prior art.

A further object of the present invention is to simplify
10 the processing and to improve the responsiveness.

A further object of the present invention is to stably keep a point in time at which a transmission wave is to be transmitted to a radio transmission line even if the transmission characteristics of the radio transmission line
15 sharply fluctuate.

A further object of the present invention is to suppress the deterioration of the transmission quality and the service quality due to the interference or obstruction on the radio transmission line.

A further object of the present invention is to simplify
20 the configuration.

A further object of the present invention is to keep the performance and the service quality high.

A further object of the present invention is to enable
25 flexible adaptation to the operating state of the system, the wireless zone, and the radio channel.

A further object of the present invention is to simplify the configurations of the hardware and the software.

A further object of the present invention is to improve
30 the reliability and to reduce the running cost.

A further object of the present invention is to perform transmission power control at a high speed and to enable adaptation to the radio transmission system applied to the CDMA system originally having a near-far problem.

A further object of the present invention is to enable
35 adaptation to a mobile communication system which may vary every moment in the transmission characteristics of the radio

transmission line.

A further object of the present invention is to keep the transmission quality and the service quality high.

5 A further object of the present invention is to enable adaptation to various radio transmission systems.

A further object of the present invention is to enable flexible adaptation to various configurations of hardware and software as well as various zone configurations and channel allocations.

10 A further object of the present invention is to enable flexible adaptation to a multiple access system and a modulating system and to acquire a stable communication line in high transmission quality without drastic restrictions on the configurations of hardware and software.

15 The aforementioned objects are achieved by a radio terminal equipment characterized by obtaining a point in time which allows the transmission of a subsequent transmission unit (slot) on the basis of a channel control procedure, by receiving a radio wave separately reached from a plurality of
20 radio stations during a period preceding the point in time transmission begins by more than the length of time needed for the process to be done under the channel controlling process preceding the beginning of transmission, and by obtaining the aforementioned point in time where the subsequent transmission
25 unit should be transmitted, based on the point in time at which all or part of the radio waves was/were received.

In the radio terminal equipment, radio wave applied to the channel control is limited to the radio wave reached through the radio transmission line during the period of which
30 the throughput required for the channel control can be acquired at the transmitting end and the receiving end.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that the point in time at which transmission of the subsequent transmission unit
35 is allowed is given relative to the preceding point in time at which transmission of any transmission unit is done.

In the radio terminal equipment, the radio wave applied

to the channel control is specified by a simple window in a time-domain so long as the aforementioned point in time is reliably given.

Moreover, the aforementioned objects are achieved by the
5 radio terminal equipment characterized in that a reference point in time is obtained as a weighted average of the levels or transmission qualities e_1 to e_n of the radio waves and the times t_1 to t_n at which the individual radio wave is received.

In the radio terminal equipment, the point in time at
10 which the transmission wave is to be transmitted to the radio transmission line is stably kept even when the transmission characteristics of the radio transmission line sharply fluctuate.

Moreover, the aforementioned objects are achieved by the
15 radio terminal equipment characterized in that a transmission unit is received as a radio wave in periods in a predetermined cycle, and that a period is given as a set of periods, in which radio waves, which individually follow another set of radio waves received during the period corresponding to the word
20 length of the transmission unit and precedes the period given as a subset of periods, can be received by the local station.

In the radio terminal equipment, the radio wave to be processed under the channel control is limited to the ones reaching the local station during the period with the length
25 of an interval almost equal to the length of a period in a cycle of the radio wave.

On the other hand, the aforementioned objects are achieved by the radio terminal equipment characterized in that a transmission unit is received as a radio wave during periods
30 in a predetermined cycle, and that a period is given as a period which extends from the beginning of a period during which a radio wave subsequent to any radio wave first received is able to have reached, up until the end of a period during which a radio wave subsequent to any radio wave last received is able
35 to have reached.

In the radio terminal equipment, the radio wave to be processed on the channel control is limited to the one which

reached at the local station during the period simply clocked and almost equal to the period of the radio wave.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that the length of time needed for the processing (including the processing to be done at a radio station connected through the radio transmission line) to be done under the channel control according to the channel controlling procedure is monitored and that the period corresponding to the result is determined.

In the radio terminal equipment, the process to be done according to the channel controlling procedure is stably performed with the load on the radio station kept at a proper level.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that the length of time needed for the processing is obtained by being rounded by the value at which the deterioration of the transmission efficiency is tolerable.

In the radio terminal equipment, even if the radio terminal equipment of the present invention is in motion, the length of time needed for the processing the radio wave is easily obtained without lowering the performance, which is due to the fall of the transmission speed.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that operations of the components unused during the process are restricted.

In the radio terminal equipment, the unnecessary power consumption is lowered so that reliability is improved and the running cost is reduced.

Furthermore, the aforementioned objects are achieved by a radio terminal equipment where the components to be given operation restrictions are not used for the process to obtain either a period for the processing or a starting point of the period.

In the radio terminal equipment, reduction of unnecessary power consumption of the elements unused for the internal processing, which obtains both or either of the

aforementioned period and/or its starting point, is enabled.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that process under the transmission power control is done per time slot, which
5 is a transmission unit.

In the radio terminal equipment, the present invention can be applied to the radio transmission system applied to the CDMA system originally having the near-far problem, because the shorter the periods in cycles of the radio waves reaching
10 local stations are, the higher the speed of the performance of the transmission power control is.

Furthermore, the aforementioned objects are achieved by the radio terminal equipment characterized in that transmission loss of the radio transmission line formed
15 between a plurality of radio stations is obtained according to the level of the radio waves transmitted by the radio stations with known radiation power from the plurality of radio stations, and the radio wave received through the radio transmission line having a small transmission loss is made the
20 object of the processing done under the channel controlling procedure.

In the radio terminal equipment, the present invention can be applied to the mobile communication system in which the transmission characteristics of the radio transmission line
25 may vary every moment, since the wireless zone of the radio wave reaching the local station with high transmission quality or field strength level is an object of the channel control.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that a demodulating
30 means is provided, and that the demodulating means demodulates all or part of the radio waves to be a referential point in time.

In the radio terminal equipment, the transmission quality and the service quality are kept high since
35 transmission information is given under the demodulating of a radio wave reaching the local station with high field strength level and transmission quality.

002220" 4200T560

Furthermore, the aforementioned objects are achieved by the radio terminal equipment characterized in that demodulating means is provided and that the demodulating means demodulates radio waves to be a referential point in time together with all or part of the radio waves received preceding to the point in time at which the subsequent transmission unit is to be transmitted.

In the radio terminal equipment, the present invention can be applied to various radio transmission systems because transmission information is restored by desired demodulation processing.

Moreover, the aforementioned objects are achieved by the radio terminal equipment characterized in that the processing involves the processing to determine the point in time at which a subsequent transmission unit is to be transmitted, by transmitting the subsequent transmission unit to the determined point in time.

The radio terminal equipment can be flexibly adaptable to various configurations as long as the processing procedure is reliably done, because the process to be done assigning the aforementioned point in time.

Here, further objects and characteristics of the present invention will be described in detail in the following based on the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Fig. 1 is a block diagram showing the principle of the present invention;

Fig. 2 is a diagram showing the first embodiment of the present invention;

Fig. 3 is a diagram explaining the operations of the first embodiment of the present invention;

Fig. 4 is a flow chart showing the operations of the first to fourth embodiments of the present invention;

Fig. 5 is a diagram explaining the operations of the third embodiment of the present invention;

Fig. 6 is a diagram showing the configuration of a watching time compensation table;

Fig. 7 is a flow chart showing the operations of the sixth embodiment of the present invention;

5 Fig 8 is a diagram explaining the operations of the first
embodiment of the present invention;

Fig. 9 is a diagram showing an example of the configuration of a mobile communication system having applied the CDMA system;

10 Fig. 10 is a diagram showing the configuration of a mobile
station;

Fig. 11 is a diagram showing the configuration of a frame received and transmitted through a radio transmission line;

Fig. 12 is a diagram showing the configuration of a time
15 slot; and

Fig. 13 is a diagram showing a downward slot subsequently reaching a mobile station.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 First of all, the principle of a radio terminal equipment according to the invention will be described with reference to Fig. 1. Fig. 1 is a block diagram showing the principle of the invention.

The radio terminal equipment, shown in Fig. 1, is
25 composed of a receiving section 11, a channel controlling
section 12, a transmission section 13, and a demodulating
section 21 and 31.

The principle of a first radio terminal equipment according to the invention is as follows.

30 The receiving section 11 receives a plurality of radio waves that concurrently reached through a radio transmission line with a deviation in time. The channel controlling section 12 processes any of the received radio waves according to the procedure of a channel control.

35 The transmission section 13 transmits a transmission
wave signifying a response to the radio wave processed, to the
radio transmission line.

On the other hand, the channel controlling section 12 is given in advance a period, for which both the length of time needed for the aforementioned processing and the length of time needed for the processing, that is done by the radio stations
5 opposed to each other through a radio transmission line, of transmission waves, are adapted to the channel control system and to the transmission system of this radio transmission line. Moreover, the channel controlling section 12 processes such a radio wave that is received for that period by the receiving
10 section 11 among the aforementioned plurality of radio waves.

In short, the radio wave to be processed under the channel control is limited to that which has reached through the radio transmission line within the period for which both the receiving end and the transmitting end of the radio wave can
15 maintain the throughput of the processing for the channel control.

As compared with the prior art in which such radio wave is not limited in the least, therefore, the channel control is made stably and highly reliably.

20 The principle of a second radio terminal equipment according to the invention is as follows.

The channel controlling section 12 is given in advance a period as a time relative to the point in time at which specific one of a plurality of radio waves is received by the
25 receiving section 11.

In short, the radio wave to be processed under the channel control is specified through a simple window in a time-domain so long as the point in time at which the aforementioned specific radio wave was received is given.

30 As compared with the first radio terminal equipment, therefore, the processing is simplified, and the responsiveness is improved.

The principle of a third radio terminal equipment according to the invention is as follows.

35 The receiving section 11 measures, on a plurality of radio waves, the receipt time and the transmission quality or field strength level respectively. The channel controlling

002220" 42007560
section 12 determines the point in time at which the transmission wave is to be transmitted, as a relative value to the point in time which is equal to the average value of the sum of products of the time and the transmission quality or field strength level measured for a predetermined period.
5 The transmission section 13 transmits the transmission wave at the point in time thus determined.

The aforementioned operation for obtaining the average value of the sum of products corresponds to the weighted
10 integration which is performed at the time given in the sequence of a time series by using the transmission quality or field strength level given together with the time as the weight.

Even when the transmission characteristics of the radio
15 transmission line abruptly fluctuate, therefore, the point in time at which the transmission wave is to be transmitted to that radio transmission line is stably maintained.

The principle of a fourth radio terminal equipment according to the invention is as follows.

20 A plurality of radio waves reach individually and sequentially for the periods having an identical nominal value.

On the other hand, the aforementioned period is given as a subset of the periods for which those radio waves can be
25 received by the receiving section 11 subsequent to the point in time at which those radio waves individually reached during the preceding period.

Of the radio waves having reached through the radio transmission line, more specifically, the radio wave for the
30 channel controlling section 12 to process under the channel control is limited to the radio wave which reached during the period given at an interval substantially equal to the period of those radio waves.

As compared with the case in which such period is not
35 limited in the least according to the aforementioned period, therefore, the drop in the transmission quality and the service quality caused by the interference and jamming on the radio

transmission line is suppressed.

The principle of a fifth radio terminal equipment according to the invention is as follows.

5 A plurality of radio waves reach individually and sequentially in a common period having an identical nominal value.

10 On the other hand, the aforementioned period is given as a subset of the periods from the point in time at which those radio waves firstly reached for the preceding period to the point in time at which another group of radio waves finally reached.

15 Of the radio waves having reached through the radio transmission line, more specifically, the radio wave for the channel controlling section 12 to process according to the channel control is given under a simple clocking and is limited to the radio wave which reached during the period given at an interval substantially equal to the period of those radio waves.

20 As compared with the aforementioned fourth radio terminal equipment, therefore, the configuration is simplified, and as in the radio terminal equipment, the drop in the transmission quality and the service quality, caused by the interference and jamming on the radio transmission line is suppressed.

25 The principle of a sixth radio terminal equipment according to the invention is as follows.

30 The channel controlling section 12 determines the length of time needed for processing the radio wave received by the receiving section 11 according to the procedure of a channel control, and the length of time needed for a radio station connected through the radio transmission line to process the response transmitted by the transmission section 13 under the procedure of the processing.

35 Moreover, the channel controlling section 12 processes among these radio waves, such radio waves that was received during the period for which the determined individual lengths of time take values suitable for the channel control system.

002220" 4200T560

In short, the processing to be done under the procedure of the channel control by the channel controlling section 12 is stably performed while holding the load of the aforementioned radio station at a proper level, so that the performance and the service quality are kept high.

The principle of a seventh radio terminal equipment according to the invention is as follows.

Both or either of the length of time needed for the processing of the radio wave by the receiving section 11 and the length of time needed for a radio station opposed through a radio transmission line to process a response transmitted by the transmission section 13 according to the procedure of the processing vary in accordance with an event which can be identified by the channel controlling section 12 in the process of the channel control.

The channel controlling section 12 determines both or either of the aforementioned lengths of time needed in accordance with the event which was identified on the basis of the procedure of the channel control.

In short, the aforementioned lengths of time needed are flexibly determined in a desired accuracy even when the lengths of time needed are different depending upon the operating states of the system, the wireless zone and the radio channel to be accessed to by the radio terminal equipment according to the invention, so long as their factors are identified as the event under the aforementioned procedure of the channel control.

The principle of an eighth radio terminal equipment according to the invention is as follows.

The channel controlling section 12 determines the length of time needed for processing the radio wave received by the receiving section 11 according to the procedure of the channel control, in an accuracy allowing both or either of the fall in the transmission speed of the radio transmission line and the deviation of the radio wave.

In short, the length of time needed for processing the radio wave by the channel controlling section 12 is

conveniently determined without any deterioration in the performance, caused by the fall in the transmission speed, even while the radio terminal equipment according to the invention is moving.

5 As compared with the aforementioned sixth radio terminal equipment, therefore, the configurations of hardware and software are simplified.

The principle of a ninth radio terminal equipment according to the invention is as follows.

10 The channel controlling section 12 restricts, in its processing procedure, the operation of such one of elements configuring the receiving section 11, the channel controlling section 12 and the transmission section 13 as is not used for processing the radio wave received by the receiving section
15 11 under the channel controlling procedure.

In short, the useless power consumption is suppressed, so that the reliability is enhanced, and so that the running cost is reduced, as compared with the foregoing first to eighth radio terminal equipments.

20 The principle of a tenth radio terminal equipment according to the invention is as follows.

The element, which is not used for processing the radio wave received by the receiving section 11 under the procedure of the channel control is such one of the elements configuring
25 the receiving section 11, the channel controlling section 12 and the transmission section 13 as is not used for determining both or either of the period suited for the transmission system of the radio transmission line and the starting point of the period.

30 In short, there is reduced the power to be uselessly consumed by such one of the elements configuring the channel controlling section 12 as is not used for an internal processing to determine both or either of the aforementioned period and the starting point of the period.

35 As compared with the aforementioned ninth radio terminal equipment, therefore, the reliability is enhanced, and the running cost is reduced.

The principle of an eleventh radio terminal equipment according to the invention is as follows.

5 A plurality of radio waves individually contains control information on the transmission power control and sequentially reach for periods with a common nominal value. The channel controlling section 12 controls the transmission power, as suited for the control information contained in a specific one of a plurality of radio waves having reached during the preceding period, through both or either of the receiving
10 section 11 and the transmission section 13.

In short, the transmission power control is made at the higher speed for the aforementioned shorter period, so that the invention can be applied to a radio transmission system to which the CDMA intrinsically accompanied by a near-far
15 problem is applied.

The principle of a twelfth radio terminal equipment according to the invention is as follows.

20 The channel controlling section 12 watches the transmission quality or the field strength level of the radio wave, which is received by the receiving section 11 for the individual wireless zones under the zone configuration and the channel allocation, and makes a channel control on the wireless zone in which the transmission quality or the field strength level is the maximum.

25 In short, the wireless zone in which the transmission quality or the field strength level of the radio wave having reached is to be an object of the channel control, so that the invention can be applied to a mobile communication system in which the transmission characteristics of the radio
30 transmission line can vary every moment.

The principle of a thirteenth radio terminal equipment according to the invention is as follows.

35 The demodulating section 21 acquires transmission information either by demodulating all or some of the radio waves, which become an object of the processing by the channel controlling section 12, or by demodulating under a predetermined weighting.

In short, the transmission information is acquired by demodulating the radio waves having reached with high field strength level and transmission quality, so that the transmission quality and the service quality are kept high.

5 The principle of a fourteenth radio terminal equipment according to the invention is as follows.

The demodulating section 31 acquires transmission information either by demodulating all or some of a plurality of radio waves having reached through the radio transmission line and received in parallel by the receiving section 11, or by demodulating under a predetermined weighting.

In short, the transmission information is restored under the desired demodulations, so that the foregoing first to twelfth radio terminal equipments can be realized in various radio transmission systems.

The principle of a fifteenth radio terminal equipment according to the invention is as follows.

The channel controlling section 12 determines the point in time at which the transmission wave is to be transmitted to the radio transmission line. On the other hand, the transmission section 13 transmits the transmission wave at the point in time thus determined.

Specifically, the processing to be done by the channel controlling section 12 under the procedure of the channel control involves the one for determining the aforementioned point in time, so that it can be flexibly applied to the various zone configurations, channel allocations and configurations of the hardware and software, so long as the processing procedure is reliably given.

30 The principle of a sixteenth radio terminal equipment
according to the invention is as follows.

The point in time at which the transmission wave is to be transmitted to the radio transmission line varies according to the event which the channel controlling section 12 can be identified in the procedure of the channel control.

The channel controlling section 12 determines the point in time at which the aforementioned transmission wave is to

be transmitted, according to the event which was identified on the basis of the channel controlling procedure.

Specifically, the point in time at which the aforementioned transmission wave is to be transmitted to the radio transmission line is flexibly determined in a desired accuracy even when it is different according to the operating states of the system, the wireless zone and the radio channel to be accessed to by the radio terminal equipment of the invention, so long as the factors to be used for determining the point in time are identified as the event in the aforementioned channel controlling procedure.

Embodiments of the present invention will be described in detail with reference to the accompanying drawings that follows.

Fig. 2 is a diagram showing an embodiment of the invention.

In Fig. 2, the components and functions same as those mentioned in Fig. 10 will be indicated by the common reference numerals and the description thereof will be omitted here.

The configurational differences between this embodiment and the prior art shown in Fig. 10 is in the configuration of mobile stations 61-1 to 61-4 which are provided in place of the mobile stations 73-1 to 73-4 shown in Fig. 9.

The configurational differences between the mobile station 61-1 and the mobile station 73-1 are that: a CDMA controlling part 62-1 is provided in place of the CDMA controlling part 92-1; a receiving timing detecting part 63-1 is provided in place of the receiving timing detecting part 91-1; a receiving signal processing part 64-1 is provided in place of the receiving signal processing part 93-1; the control input of the receiving timing detecting part 63-1 is connected with a corresponding control output of the CDMA controlling part 62-1; and with a specific control input of the CDMA controlling part 62-1 is connected a corresponding output of the receiving signal processing part 64-1.

Here, the configurations of the mobile stations 61-2 to 61-4 are identical to that of the mobile station 61-1, so that

the corresponding components will be indicated by the common reference numerals to which the suffixes "2" to "4" are attached and the description thereof will be omitted here.

On the other hand, the configuration of the mobile communication system for providing the communication services for the mobile stations 61-1 to 61-4 thus configured is basically identical to that of the prior art shown in Fig. 9.

Therefore, the numerals "61-1" to "61-4" are added to the mobile stations 73-1 to 73-4 shown in Fig. 9, respectively, and reference will be additionally made to Fig. 9.

Fig. 3 is a diagram for explaining the operations of the first embodiment of the invention.

Fig. 4 is a flow chart of the operations of the first to fourth embodiments of the invention.

The operations of the first embodiment of the invention will be described with reference to Figs. 2 to 4 and Fig. 8.

The receiving signal processing part 64-1 fetches the "downward transmission information", obtained, in common with the prior art, in conjunction with the antenna interfacing part 82-1, the receiving part 87-1, the orthogonal demodulation part 88-1, the despreading part 89-1, the demodulating part 90-1 and the receiving timing detecting part 63-1, to synchronize the individual downward slots contained in the "downward transmission information".

Moreover, the receiving signal processing part 64-1 determines the points in time signifying the beginnings (or ends) of those downward slots, individually, and informs the CDMA controlling part 62-1 of those points in time sequentially.

On the other hand, the CDMA controlling part 62-1 is given in advance a watching time $t_w (= T_F/16 - \tau)$ that signifies the period (which may be one succeeding longer than a time slot length (= 625 microseconds)) satisfying the condition to retain all the following times on the points in time thus informed, as a relative value to the point in time which can be the beginning of the succeeding upward slots, as shown in Fig. 3:

Time required for the processing (including not only the internal processing to be done only by the CDMA controlling part 62-1 but also the processing to be done in association with the receiving signal processing part 64-1) to be done on the information contained in the corresponding downward slot according to the procedure of the channel control;

Time required for the generation and transmission of an upward slot (or frame) including the information to be transmitted to a radio base station (which may be not only the radio base station for forming a wireless zone where the local station is located but also the radio base station capable of becoming a destination in the hand-over procedure); and

Time required for a destination radio base station to receive such upward slot reliably and to process the upward slot according to the procedure of the channel control by warranting the responsiveness and the service quality desired.

Here, the value of such watching time t_w is preset as suited not only for the zone configuration and the channel allocation of the mobile communication system, to which the invention is applied, and the amount, type and transmission speed of the information to be received or transmitted through the radio transmission line but also for the throughput and the mode of a functional distribution or load distribution of the hardware which is mounted on the mobile stations 61-1 to 61-4 and the radio base stations 71-1 and 71-2.

For every periods of the time slot, the CDMA controlling part 62-1 feeds (Fig. 4(1)) the receiving timing detecting part 63-1, when informed in advance of any point in time by the receiving signal processing part 64-1, as described above, with the control signal signifying the period from that point in time to the aforementioned watching time t_w .

The receiving timing detecting part 63-1 detects, only during the period signified by the control signal, the field strength level of the downward slot (or all the downward slots when the single frames has been received as the radio waves signifying those downward slots that reached the different point in time by a multipath formed in the radio transmission

line) received from both or either of the radio base stations 71-1 and 71-2, and detects a prescribed point tr (hereinafter referred to as the "reference point") according to a predetermined algorithm.

5 The CDMA controlling part 62-1 determines the point in time which is given, in common with the prior art, as the relative value to that reference point tr, as a transmission point.

10 Moreover, the CDMA controlling part 62-1 is associated as in the prior art with the receiving signal processing part 64-1 and the spreading part 84-1 to start the transmission of the upward slot containing both or either of the speech signal to be transmitted to the radio base stations 71-1 and 71-2 and any control information relating to the channel control of a
15 corresponding call to some destination, at the aforementioned transmission point, and control the transmission power by giving the transmission part 86-1 the level suited for the value of the TCP bit contained in any downward slot received in advance.

20 Thus according to this embodiment, for the period suited for the configuration and the specification of the system, the predetermined processing is completed for the information contained in the downward slot received in advance.

25 Therefore, the service quality is kept higher than that of the prior art in which the reference point tr is set at a point in time other than the aforementioned watching time tw.

30 Here, this embodiment performs the aforementioned transmission power control, which corresponds to a processing to be done according to the procedure of the channel control but which may be omitted when the invention is applied to the radio transmission system allowing the near-far problem and the degradation of the transmission quality.

35 In this embodiment, on the other hand, there is not specified the radio waves (or the combination of the frames contained in the "downward transmission information") to be demodulated by the demodulating part 90-1.

 However, for example, the CDMA controlling part 62-1

gives the demodulating part 90-1 and the despreading part 89-1 the watching time t_w together with the aforementioned control signal: only the radio waves, which were received for the period over the watching time t_w from the point in time informed
5 by the receiving signal processing part 64-1, may be the object of the demodulation. Alternatively, as in the prior art, all the radio waves may be the object of the demodulation irrespective of such watching time t_w .

In this embodiment, moreover, the processing to be done
10 as the reference of calculating the aforementioned watching time t_w by the CDMA controlling part 62-1 according to the procedure of the channel control is not specified. When the processing for determining the transmission point is done not by the dedicated hardware but under a program control, for
15 example, the throughput of the processing may be taken into consideration as the reference for calculating the watching time t_w .

The operations of a second embodiment of the invention will be described with reference to Fig. 2.

20 The difference of this embodiment from the aforementioned first embodiment resides in the following operations to be done by the receiving timing detecting part 63-1 and in the processing procedure for the CDMA controlling part 62-1 to determine the reference point t_r .

25 The receiving timing detecting part 63-1 detects the received points t_1 to t_n (hereinafter referred to as the "individual points") for all the downward slots received from both or either of the radio base stations 71-1 and 71-2, only during the period which is signified by the control signal
30 given by the CDMA controlling part 62-1.

On the other hand, the receiving timing detecting part 63-1 informs the CDMA controlling part 62-1 of those individual points t_1 to t_n sequentially as combinatorial sequences (t_1 , e_1), - - -, and (t_n , e_n) with measured field intensities (e_1 -
35 e_n).

For these combinatorial sequences, the CDMA controlling part 62-1 determines the reference point t_r as the weighted

average value weighted by the field strength level, as expressed by the following formula:

$$t_r = \frac{1}{n} \cdot \sum_{i=1}^n (e_i \cdot t_i)$$

Moreover, the CDMA controlling part 62-1 determines the transmission point in advance according to the reference point t_r as in the foregoing first embodiment.

Thus according to this embodiment, the reference point is given as the average value, for which the point in time at which a plurality of downward slots are individually received is weighted the more for the higher field intensities of those downward slots.

Even when the transmission characteristics of the radio transmission line drastically fluctuate in response to the movement of the mobile station 61-1 and the change in landform and the planimetry existing in the radio transmission line formed between the mobile station 61-1 and the radio base stations 71-1 and 71-2, therefore, an abrupt change in the reference point is avoided to keep the accuracy of the channel control and the communication quality stably high.

Here in this embodiment, the aforementioned field intensities e_1 to e_n are applied as the weights, but the transmission qualities (as given as syndromes or bit error rates, for example) to be identified in the decoding process suited for the transmission line coding system may be applied as the weights in place of or together with those field intensities e_1 to e_n .

Fig. 4 is a flow chart of the operations of the first to fourth embodiments of the invention.

The operations of the third embodiment of the invention will be described with reference to Fig. 2 and Fig. 5.

The difference of this embodiment from the foregoing individual embodiments resides in the following processing procedure which is made by the CDMA controlling part 62-1 to generate the control signal to be fed to the receiving timing detecting part 63-1.

As in the foregoing embodiments, the receiving signal processing part 64-1 fetches the "downward transmission

information" to synchronize with the individual frames contained in the "downward transmission information".

Moreover, the receiving signal processing part 64-1 specifies the points in time signifying the trails of those frames on the basis of the individually contained frame numbers. SFN and the known configurations, and informs the CDMA controlling part 62-1 of those points in time sequentially.

Just after the local station shifts to a standby state in any wireless zone, on the other hand, the CDMA controlling part 62-1 determines the reference point t_r , as in the prior art or in any of the foregoing embodiments, and determines the relative transmission point to that reference point.

Here, when the transmission point is to be determined as in any of the foregoing embodiments, the CDMA controlling part 62-1 feeds the receiving timing detecting part 63-1 with the control signal signifying the period over the aforementioned watching time t_w from the point in time informed foremost by the receiving signal processing part 64-1 for every periods of the downward slots.

On the other hand, the number of the downward slots to be received by the receiving timing detecting part 63-1 during the period signified by that control signal will be assumed "N" for simplicity.

The CDMA controlling part 62-1 identifies, after having performed the aforementioned operations over a single downward slot period, the period (hereinafter referred to as the "provisory period") which is composed of a set of periods subsequent by $(TF/16-mN)$ to $(TF/16+mP)$ on the time axis relative to the individual points informed by the receiving signal processing part 93-1, as hatched in Fig. 5.

Moreover, the CDMA controlling part 62-1 feeds the receiving timing detecting part 63-1 with the control signal signifying such one in those provisory periods as corresponds to the period over the aforementioned watching period t_w from the leading point of the provisory period, as shown in Fig. 5.

Here, both the letters mN and mP are positive values

signifying the absolute values of the lower limit and the upper limit of such a deviation of the period ($= TF/16$) of the downward slot as is allowed insofar as the aforementioned conditions for giving the watching time t_w are satisfied.

5 Specifically, the downward slot whose field strength level is identified by for the receiving timing detecting part 63-1 for detecting the reference point t_r is limited to the downward slot which is received again later than the period of a substantially single downward slot with respect to the
10 downward slot antecedently received.

Thus according to this embodiment, the possibility for the reference point t_r to be improperly fluctuated by the abrupt fluctuation in the transmission characteristics of the radio transmission line, the overreach and so on is suppressed
15 to keep the transmission quality is kept favorable and the channel control is carried out stably.

Here in this embodiment, the CDMA controlling part 62-1 feeds the receiving timing detecting part 63-1 with the control signal signifying such one in the provisory period as
20 corresponds to the period over the aforementioned watching period t_w from the leading point of the provisory period.

However, the processing may be simplified by feeding the receiving timing detecting part 63-1 with the control signal signifying such a period of the period continuing from the
25 beginning to the end of the provisory period, for example, in place of the aforementioned period, as corresponds to the period over the watching period t_w from the leading point of that period.

In this embodiment, on the other hand, the
30 aforementioned absolute values m_N and m_P are not specified.

However, these absolute values m_N and m_P may be any value as long as they fit the configuration and specifications of the system and are reliably given in advance.

The operations of the fourth embodiment of the invention
35 will be described with reference to Fig. 2 and Fig. 4.

The difference of this embodiment from the foregoing individual embodiments resides in the following processing

procedure to be performed by the CDMA controlling part 62-1.

In a specific storage domain of the main memory built in CDMA controlling part 62-1, as shown in Fig. 6, a watching
5 time compensation table 62A in which a combination of the following processing identifier IDP and a coefficient Δt is registered in advance is allocated:

·Processing identifier IDP signifying an item of processing to be done under the procedure of the channel
10 control; and

·Coefficient Δt to be applied for compensating the aforementioned watching time t_w to a value suited for the throughput required for the processing signified by the processing identifier IDP.

15 Here, the coefficient Δt is given as a positive value or a negative value suited for the throughput preset as the premise for calculating the watching time t_w .

On the other hand, this throughput contains not only the throughput of the processing done only by the CDMA controlling
20 part 62-1 but also the fluctuation of the response time of the individual parts sharing the predetermined load and function in association with that CDMA controlling part 62-1.

This CDMA controlling part 62-1 fetches the "downward transmission information" contained in the individual
25 downward slots obtained by the despreading part 89-1 and the "downward transmission information" contained in the downward slot obtained by the demodulating part 90-1, and judges (Fig. 4(a)) whether or not the control information on the channel control is contained in those downward slots or whether or not
30 the state (i.e., quality or distribution) of the radio waves is the state in which the processing time should be updated.

When the result of the judgement above is true, moreover, the CDMA controlling part 62-1 analyzes the state of the corresponding control information or radio wave, to specify
35 (Fig. 4(b)) the item of the processing to be done according to the control information, and acquires (Fig. 4(c)) the coefficient value registered in the watching time compensation

table 62A together with the processing identifier signifying that item.

On the other hand, the CDMA controlling part 62-1 applies (Fig. 4(d)) the correction value which is given as a sum of the aforementioned watching time t_w and the coefficient value thus obtained, in place of the watching time t_w .

In other words, the watching time t_w is suitably updated in response to the increase/decrease of the throughput of the processing to be done according to the control information contained in the received downward slots.

According to this embodiment, therefore, as compared with the case in which the watching time t_w is not updated in the least, the drop in the responsiveness and the transmission quality is relaxed and a flexible channel control based on the various procedures can be achieved.

Here in this embodiment, neither the processing item corresponding to the processing identifier IDP and the accuracy of the coefficient Δt are specified.

However, the itemizing mode of the processing item and the accuracy of the coefficient Δt may be set anyhow so long as the watching time t_w is updated in the desired reliability and accuracy within the range of the storage capacity of the main memory and the throughput in the CDMA controlling part 62-1.

The operations of the fifth embodiment of the invention will be described with reference to Fig. 2 and Fig. 6.

The difference of this embodiment from the foregoing fourth embodiment resides in the procedure of the following processing to be done by the CDMA controlling part 62-1.

In the main memory of the CDMA controlling part 62-1, there is allocated, in place of the watching time compensation table 62A, a watching time compensation table 62B in which, in advance, with the following controlled object identifier id_C and restriction period information id_P are stored individually corresponding to the aforementioned processing identifier IDP:

· Controlled object identifier id_C signifying all or some

of the despreading part 89-1, the receiving timing detecting part 63-1, the transmission information generating part 83-1, the spreading part 84-1, the orthogonal modulation part 85-1, the transmission part 86-1 and the receiving signal processing part 64-1; and

·Restriction period information idP given as a relative value to either the point in time of the beginning (or end) of the upward slots to be transmitted to the radio base stations 71-1 and 71-2 or the point in time (hereinafter referred to as the "reference point") of the beginning (or end) of the downward slots received from those radio base stations 71-1 and 71-2 and signifying the period for which the operations of the individual parts signified individually by the aforementioned controlled object identifier idC are to be restricted.

The CDMA controlling part 62-1 acquires, when determining the processing identifier IDP as in the foregoing fourth embodiment, the controlled object identifier idC and the restriction period information idP which are registered in the watching time compensation table 62B in a manner to correspond to that processing identifier IDP.

Moreover, the CDMA controlling part 62-1 restricts the operations of such all or some of the despreading part 89-1, the receiving timing detecting part 63-1, the transmission information generating part 83-1, the spreading part 84-1, the orthogonal modulation part 85-1, the transmission part 86-1 and the receiving signal processing part 64-1 as are signified by that controlled object identifier idC, over the period which is given by the restriction period information idP relative to the reference time.

Thus according to this embodiment, in the procedure of the processing to be done under the procedure of the channel control in response to the downward slots received antecedently from the radio base stations 71-1 and 71-2, the operations of the individual portions, which may not operate, are restricted under the lead of the CDMA controlling part 62-1.

As compared with the case in which no such restriction on the operations is made, therefore, the power consumption is reduced so that the time for which the communication service is provided continuously without charging the battery will be elongated.

Here in this embodiment, the controlled object identifier idC contains an identifier signifying any one of the despreding part 89-1, the receiving timing detecting part 63-1, the transmission information generating part 83-1, the spreading part 84-1, the orthogonal modulation part 85-1, the transmission part 86-1 and the receiving signal processing part 64-1.

However, the controlled object identifier idC contains a plurality of identifiers so that the electric power to be uselessly consumed at the individual parts may be reduced more accurately by incorporating the identifier signifying the period, for which the operations are restricted in the individual parts signified individually by those identifiers, into the restriction period information idP.

In this embodiment, on the other hand, the operations are wholly restricted over the period signified by the restriction period information idP upon the despreding part 89-1, the receiving timing detecting part 63-1, the transmission information generating part 83-1, the spreading part 84-1, the orthogonal modulation part 85-1, the transmission part 86-1 and the receiving signal processing part 64-1.

However, restrictions above may be suitably made at such a module in the hardware or software that a useless processing and power consumption are made.

Fig. 7 is a flow chart of the operations of a sixth embodiment of the invention.

Fig. 8 is a diagram for explaining the operations of the sixth embodiment of the invention.

The operations of the sixth embodiment of the invention will be described with reference to Fig. 2, Fig. 7 and Fig. 8.

002220" 4200T560

5 The difference of this embodiment from the foregoing first to fifth embodiments resides in the following processing procedure to be done by the CDMA controlling part 62-1 and in the operations of the individual parts to be performed under the control of the CDMA controlling part 62-1.

10 In the mobile station 61-1, during the period for searching the wireless zone in which the local station shifts to the standby state and the wireless zone to which the local station is to shift the hand-over process, for example, the receiving unit 87-1 receives the broadcasting signals (Fig. 8(a) to (c)) reached individually from the radio base stations 71-1 and 71-2, in parallel for every downward slots, and measures the field intensities of those downward slots.

15 On the other hand, those broadcasting signals are transmitted with constant transmission powers having nominal values known in the radio terminal equipment, by the radio base stations 71-1 and 71-2 but are not objects of the transmission power control.

20 The receiving timing detecting part 63-1 informs the CDMA controlling part 62-1 suitably of the field intensities of those broadcasting signals (or downward slots) while identifying them for every wireless zones (or radio base stations).

25 The CDMA controlling part 62-1 integrates (Fig. 7(1)) those field intensities in parallel for every wireless zones (or radio base stations) and selects (Fig. 7(2)) such one of the radio transmission lines formed between the radio base stations 71-1 and 71-2 as gives the maximum as the result of the integration.

30 Moreover, the CDMA controlling part 62-1 determines (Fig. 7(3)) the downward frame (containing the broadcasting signal) received through the radio transmission line thus selected, in conjunction with the receiving timing detecting part 63-1 and the receiving signal processing part 64-1 as well as the receiving part 87-1, the orthogonal demodulation part 88-1, the despreading part 89-1, the demodulation part 90-1, the transmission information generating part 83-1, the spreading

35

part 84-1, the orthogonal modulation part 85-1 and the transmission part 86-1, and performs a processing similar to that of the foregoing first to fifth embodiments with reference to the leading or trailing point of the downward slots
5 contained in the downward frame.

Specifically, the transmission point of the downward slot to be transmitted by the mobile station 61-1 according to the procedure of the channel control is highly accurately determined with reference to the downward slot which reached
10 from such one of a plurality of radio base stations 71-1 and 71-2 as forms a radio transmission line having an favorable transmission quality.

According to this embodiment, therefore, it is possible to perform the channel control which is flexibly suited for the fluctuation in the transmission characteristics of the
15 radio transmission line.

Here in the foregoing individual embodiments, the invention is applied to the mobile station that is the terminal of the mobile communication system to which a wide-band CDMA system is applied.
20

However, the invention should not be limited to the wide-band CDMA but can also be applied to a radio transmission system to which any multiple access system or modulation system is applied, as long as the radio terminal equipment receives
25 the radio waves reached from a plurality of radio stations through a plurality of radio transmission lines having a difference in the delay time and processes the information given as the radio waves for any channel control.

In the foregoing individual embodiments, on the other hand, there is made the transmission power control which is effective for solving the near-far problem intrinsic to the CDMA system.
30

However, the invention can also be applied to a radio transmission system in which such transmission power control
35 is not made.

In the foregoing individual embodiments, moreover, there is not disclosed the operation procedure to be applied

to the decision of the transmission point. However, this operation procedure does not belong to the feature of the invention, but can be achieved by applying a variety of known techniques.

5 In the foregoing individual embodiments, on the other hand, the invention is applied to the radio transmission system to which a transmission unit such as the aforementioned frame is transmitted for a predetermined period through the radio transmission line.

10 However, if it is demanded that the transmission point to transmit a succeeding transmission unit is determined with reference to the point in time at which the transmission unit having reached antecedently at a different point in time is received, the invention can be applied to such radio
15 transmission system in which the period is not constant.

In the foregoing individual embodiments, moreover, there is specified neither the system nor the procedure of the channel control applied. However, the invention can also be applied to a radio transmission system to which any channel
20 control system or procedure is applied, even if the aforementioned watching time t_w or transmission point is different according to the operating states of the system such as a traffic distribution and the wireless zone, radio channel or other factors to be accessed to by the radio terminal
25 equipment according to the invention, as long as these factors are identified in the procedure of the channel control and if the watching time t_w and other values are reliably given.

On the other hand, the invention should not be limited to the foregoing embodiments. Within the scope of the
30 invention, embodiments of various modes can be made, and any improvement may be made some or all of the component parts.

CLAIMS

WHAT IS CLAIMED IS :

1. A radio terminal equipment comprising:

a receiving means for receiving in parallel a plurality
5 of radio waves which may reach the receiving means at deviating
points in time, through a radio transmission line;

a channel controlling means for processing any radio
wave of said plurality of radio waves received by said
receiving means according to a channel controlling procedure;

10 and

a transmission means for transmitting to said radio
transmission line a transmission wave signifying a response
to said radio wave which is an object of said processing by
said channel controlling means; wherein

15 said channel controlling means is given in advance a
period which accordingly makes both the said processing and
processing to be done to said transmission wave(s) by a radio
station connected through said radio transmission line have
lengths of time needed for the processes suitable for said
20 channel controlling and which is also suitable for a
transmission system in said radio transmission line, and makes
a radio wave received by said receiving means during said
period the object of said processing.

2. A radio terminal equipment as claimed in Claim 1, wherein
25 said channel controlling means has a period given in advance
relative to a point in time at which a specific one of said
plurality of radio waves is received by said receiving means.

3. A radio terminal equipment as claimed in Claim 1,
wherein:

30 of said plurality of radio waves, said receiving means
individually obtains a point in time received and measures the
transmission quality or the field strength level;

said channel controlling means obtains a point in time,
at which said transmission wave is to be transmitted, which
35 is relative to a point in time equal to the point in time
determined as a result of averaging the sum of products of said
point in time and said transmission quality or said field

strength level obtained or measured by said receiving means during said period given in advance; and

5 said transmission means transmits said transmission wave(s) at said point in time obtained by said channel controlling means.

4. A radio terminal equipment as claimed in Claim 2, wherein:

10 of said plurality of radio waves, said receiving means individually obtains a point in time received and measures the transmission quality or the field strength level;

15 said channel controlling means obtains a point in time, at which said transmission wave is to be transmitted, which is relative to a point in time equal to the point in time determined as a result of averaging the sum of products of said point in time and said transmission quality or said field strength level obtained or measured by said receiving means during said period given in advance; and

20 said transmission means transmits said transmission wave(s) at said point in time obtained by said channel controlling means.

5. A radio terminal equipment as claimed in Claim 2, wherein said plurality of radio waves reach said radio terminal equipment sequentially and separately in a cycle having an equal nominal value, and

25 said period is given as a subset of periods in which said radio waves can be received by said receiving means, and which is subsequent to said points in time at which said plurality of radio waves individually reach the receiving means during the period in said cycle which precedes said period given as the subset of periods.

30 6. A radio terminal equipment as claimed in Claim 3, wherein said plurality of radio waves reach said radio terminal equipment sequentially and separately in a cycle having an equal nominal value, and

35 said period is given as a subset of periods in which said radio waves can be received by said receiving means, and which is subsequent to said points in time at which said plurality

of radio waves individually reach the receiving means during the period in said cycle which precedes said period given as the subset of periods.

7. A radio terminal equipment as claimed in Claim 4, wherein
5 said plurality of radio waves reach said radio terminal equipment sequentially and separately in a cycle having an equal nominal value, and

said period is given as a subset of periods in which said radio waves can be received by said receiving means, and which
10 is subsequent to said points in time at which said plurality of radio waves individually reach the receiving means during the period in said cycle which precedes said period given as the subset of periods.

8. A radio terminal equipment as claimed in Claim 2, wherein
15 said plurality of radio waves reach said radio terminal equipment individually and sequentially in a common cycle having said equal nominal value, and

said period is a subset of periods from the earliest point in time, at which any of said plurality of radio waves reach
20 the receiving means during the period in said cycle which precedes said period given as the subset of periods, to the latest point in time at which any of a following said plurality of radio waves reach the receiving means.

9. A radio terminal equipment as claimed in Claim 3, wherein
25 said plurality of radio waves reach said radio terminal equipment individually and sequentially in a common cycle having said equal nominal value, and

said period is a subset of periods from the earliest point in time, at which any of said plurality of radio waves reach
30 the receiving means during the period in said cycle which precedes said period given as the subset of periods, to the latest point in time at which any of a following said plurality of radio waves reach the receiving means.

10. A radio terminal equipment as claimed in Claim 4, wherein
35 said plurality of radio waves reach said radio terminal equipment individually and sequentially in a common cycle having said equal nominal value, and

said period is a subset of periods from the earliest point in time, at which any of said plurality of radio waves reach the receiving means during the period in said cycle which precedes said period given as the subset of periods, to the latest point in time at which any of a following said plurality of radio waves reach the receiving means.

11. A radio terminal equipment as claimed in Claim 1, wherein said channel controlling means obtains lengths of time needed for both the processes to be done on said radio waves received by said receiving means according to said channel controlling procedure and to be done on responses transmitted by said transmission means under the procedure of said process, wherein the process is done by said radio station connected through said radio transmission line, and processes one or more of said radio waves received during a period where said lengths of time needed for the processes are suitable for the system of said channel control.

12. A radio terminal equipment as claimed in Claim 2, wherein said channel controlling means obtains lengths of time needed for both the processes to be done on said radio waves received by said receiving means according to said channel controlling procedure and to be done on responses transmitted by said transmission means under the procedure of said process, wherein the process is done by said radio station connected through said radio transmission line, and processes one or more of said radio waves received during a period where said lengths of time needed for the processes are suitable for the system of said channel control.

13. A radio terminal equipment as claimed in Claim 11, wherein both or either of said lengths of time needed for the process (es) to be done on said radio wave(s) received by said receiving means and/or said process done by said radio station connected through said radio transmission line to be done on said response transmitted by said transmission means under said procedure of process vary in accordance with an event(s) which can be identified by said channel controlling means in the process of said channel control, and

said channel controlling means obtains both or either of said length(s) of time needed in accordance with said event identified under said channel controlling procedure.

14. A radio terminal equipment as claimed in Claim 12, wherein both or either of said lengths of time needed for the process(es) to be done on said radio wave(s) received by said receiving means and/or said process done by said radio station connected through said radio transmission line to be done on said response transmitted by said transmission means under said procedure of process vary in accordance with an event(s) which can be identified by said channel controlling means in the process of said channel control, and

said channel controlling means obtains both or either of said length(s) of time needed in accordance with said event identified under said channel controlling procedure.

15. A radio terminal equipment as claimed in Claim 11, wherein said channel controlling means obtains said length(s) of time needed for the process (es) to be done on said radio wave received by said receiving means under said channel controlling procedure with the level of accuracy which allows both or either a fall in the transmission rate of said radio transmission line and/or said deviation of said radio wave(s).

16. A radio terminal equipment as claimed in Claim 12, wherein said channel controlling means obtains said length(s) of time needed for the process (es) to be done on said radio wave received by said receiving means under said channel controlling procedure with the level of accuracy which allows both or either a fall in the transmission rate of said radio transmission line and/or said deviation of said radio wave(s).

17. A radio terminal equipment as claimed in Claim 1, wherein said channel controlling means restricts, in said processing procedure, the operation of composing elements unrelated to a process to be done on said radio waves received by said receiving means under said channel controlling procedure, of the composing elements which are said receiving means, said channel controlling means, and said transmission means.

18. A radio terminal equipment as claimed in Claim 2, wherein

said channel controlling means restricts, in said processing procedure, the operation of composing elements unrelated to a process to be done on said radio waves received by said receiving means under said channel controlling procedure, of the composing elements which are said receiving means, said channel controlling means, and said transmission means.

19. A radio terminal equipment as claimed in Claim 17, wherein composing elements, which are said receiving means, said channel controlling means and said transmission means, unrelated to process to be done on said radio waves received by said receiving means under said channel controlling procedure is also unrelated to a process obtaining both or either a period suitable for said transmission system of said radio transmission line and/or a starting point of said period.

20. A radio terminal equipment as claimed in Claim 18, wherein composing elements, which are said receiving means, said channel controlling means and said transmission means, unrelated to process to be done on said radio waves received by said receiving means under said channel controlling procedure is also unrelated to a process obtaining both or either a period suitable for said transmission system of said radio transmission line and/or a starting point of said period.

21. A radio terminal equipment as claimed in Claim 1, wherein said plurality of radio waves respectively reach said radio terminal equipment sequentially and separately in said cycle, containing control information on transmitting power control, and

said channel controlling means controls the transmitting power suitable for said control information included in a specific radio wave of said plurality of radio waves reached during a preceding period, through both or either of said receiving means and/or said transmission means.

22. A radio terminal equipment as claimed in Claim 2, wherein said plurality of radio waves respectively reach said radio terminal equipment sequentially and separately in said cycle, containing control information on transmitting power control, and

002220"4200T560
said channel controlling means controls the transmitting power suitable for said control information included in a specific radio wave of said plurality of radio waves reached during a preceding period, through both or either
5 of said receiving means and/or said transmission means.

23. A radio terminal equipment as claimed in Claim 1, wherein

said channel controlling means monitors transmission quality or field strength level of said radio wave received by said receiving means per wireless zone on the basis of zone
10 configuration and channel allocation, and performs a channel control of a wireless zone which has the highest transmission quality or field strength level.

24. A radio terminal equipment as claimed in Claim 2, wherein

said channel controlling means monitors transmission quality or field strength level of said radio wave received by said receiving means per wireless zone on the basis of zone
15 configuration and channel allocation, and performs a channel control of a wireless zone which has the highest transmission quality or field strength level.

25. A radio terminal equipment as claimed in Claim 1, further comprising a demodulating means for acquiring transmission information either by demodulating all or part of said radio waves, which are the object of the process by said channel
20 controlling means or by demodulating said radio wave(s) under predetermined weighting.

26. A radio terminal equipment as claimed in Claim 2, further comprising a demodulating means for acquiring transmission information either by demodulating all or part of said radio waves, which are the object of the process by said channel
30 controlling means or by demodulating said radio wave(s) under predetermined weighting.

27. A radio terminal equipment as claimed in Claim 1, further comprising a demodulating means for acquiring transmission information either by demodulating all or part of said
35 plurality of radio waves reached through said radio transmission line and received in parallel by said receiving means, or by demodulating said radio wave(s) under

predetermined weighting.

28. A radio terminal equipment as claimed in Claim 2, further comprising a demodulating means for acquiring transmission information either by demodulating all or part of said plurality of radio waves reached through said radio transmission line and received in parallel by said receiving means, or by demodulating said radio wave(s) under predetermined weighting.

29. A radio terminal equipment as claimed in Claim 1, wherein said channel controlling means obtains a point in time at which said transmission wave is to be transmitted to said radio transmission line, and

said transmission means transmits said transmission wave at said point in time obtained by said channel controlling means.

30. A radio terminal equipment as claimed in Claim 2, wherein said channel controlling means obtains a point in time at which said transmission wave is to be transmitted to said radio transmission line, and

said transmission means transmits said transmission wave at said point in time obtained by said channel controlling means.

31. A radio terminal equipment as claimed in Claim 29, wherein said point in time at which said transmission wave is to be transmitted to said radio transmission line fluctuates in accordance with events which can be identified by said channel controlling means in the process of said channel control, and

said channel controlling means obtains said point in time at which said transmission wave is to be transmitted in accordance with said events identified under said channel controlling procedure.

32. A radio terminal equipment as claimed in Claim 30, wherein said point in time at which said transmission wave is to be transmitted to said radio transmission line fluctuates in accordance with events which can be identified by said channel controlling means in the process of said channel

control, and

5 procedure.

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

ABSTRACT OF THE DISCLOSURE

The object of a radio terminal equipment is to achieve a highly accurate channel control and a favorable transmission quality.

In order to achieve the object, in the radio terminal equipment,

- 5 a channel controlling means is given in advance a period which accordingly makes both the processing and processing to be done to a transmission wave(s) by a radio station connected through a radio transmission line have lengths of time needed for the processes suitable for channel controlling and which is also
- 10 suitable for a transmission system in a radio transmission line, and makes a radio wave received by a receiving means during the period the object of the processing. Therefore, a radio transmission system having the present invention applied adapts flexibly to various multiple access systems and
- 15 modulation systems, and stably maintains the transmission quality of channels high, without having drastic restrictions on the configuration.

FIG. 2

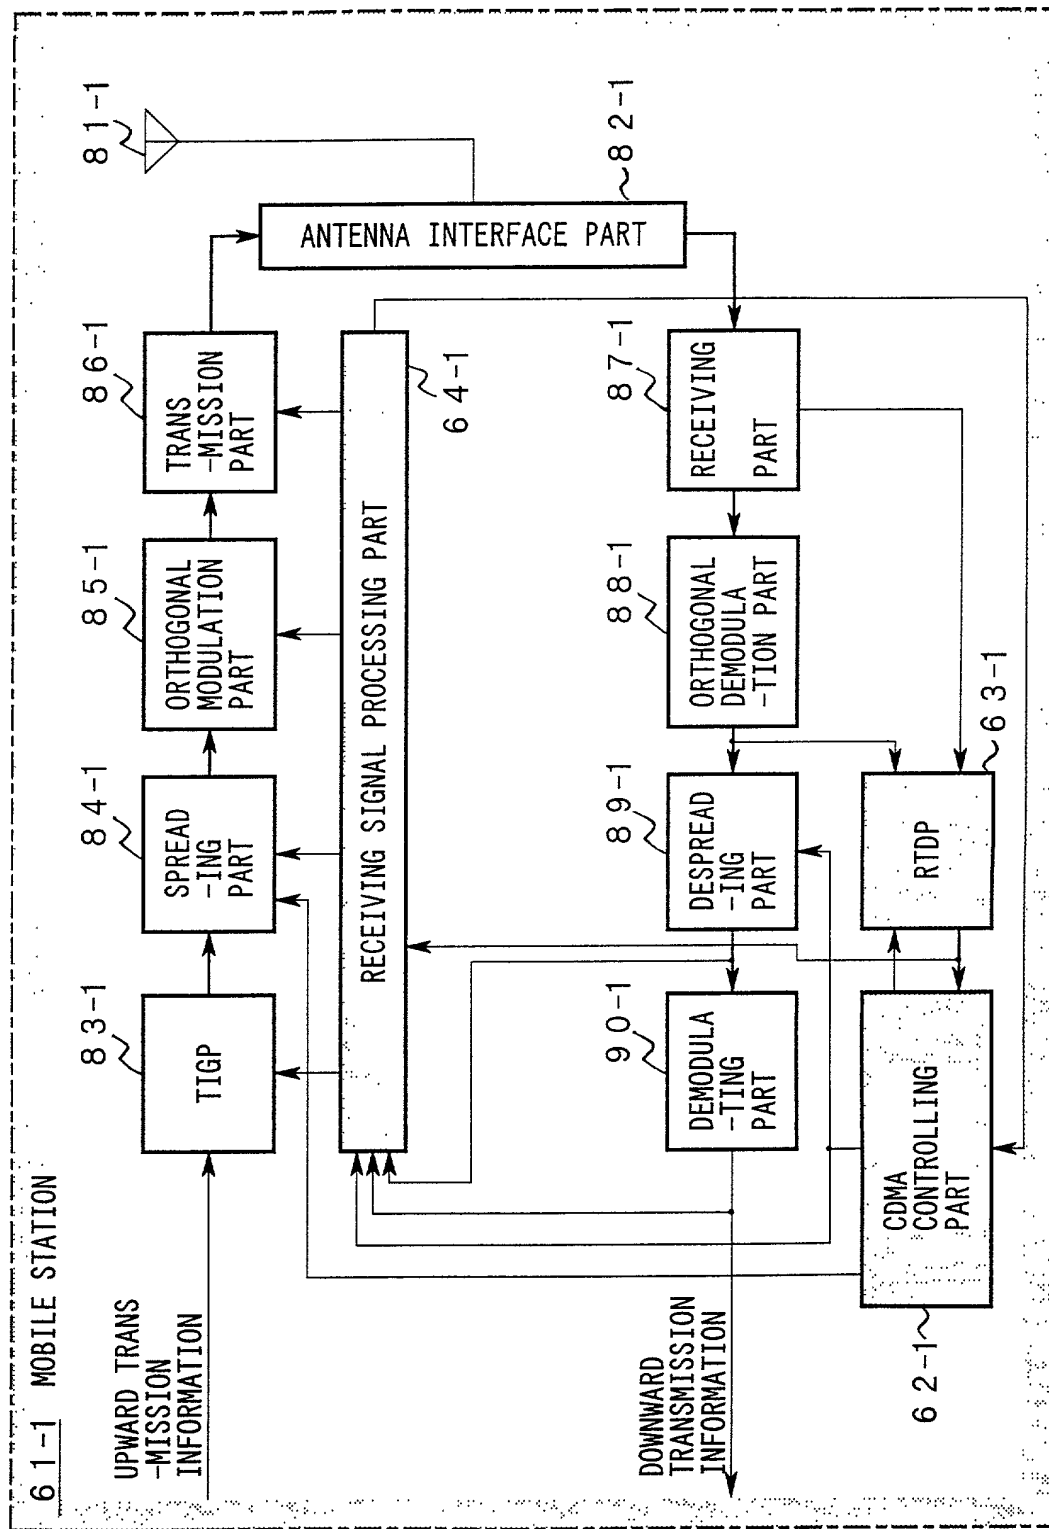


FIG. 4

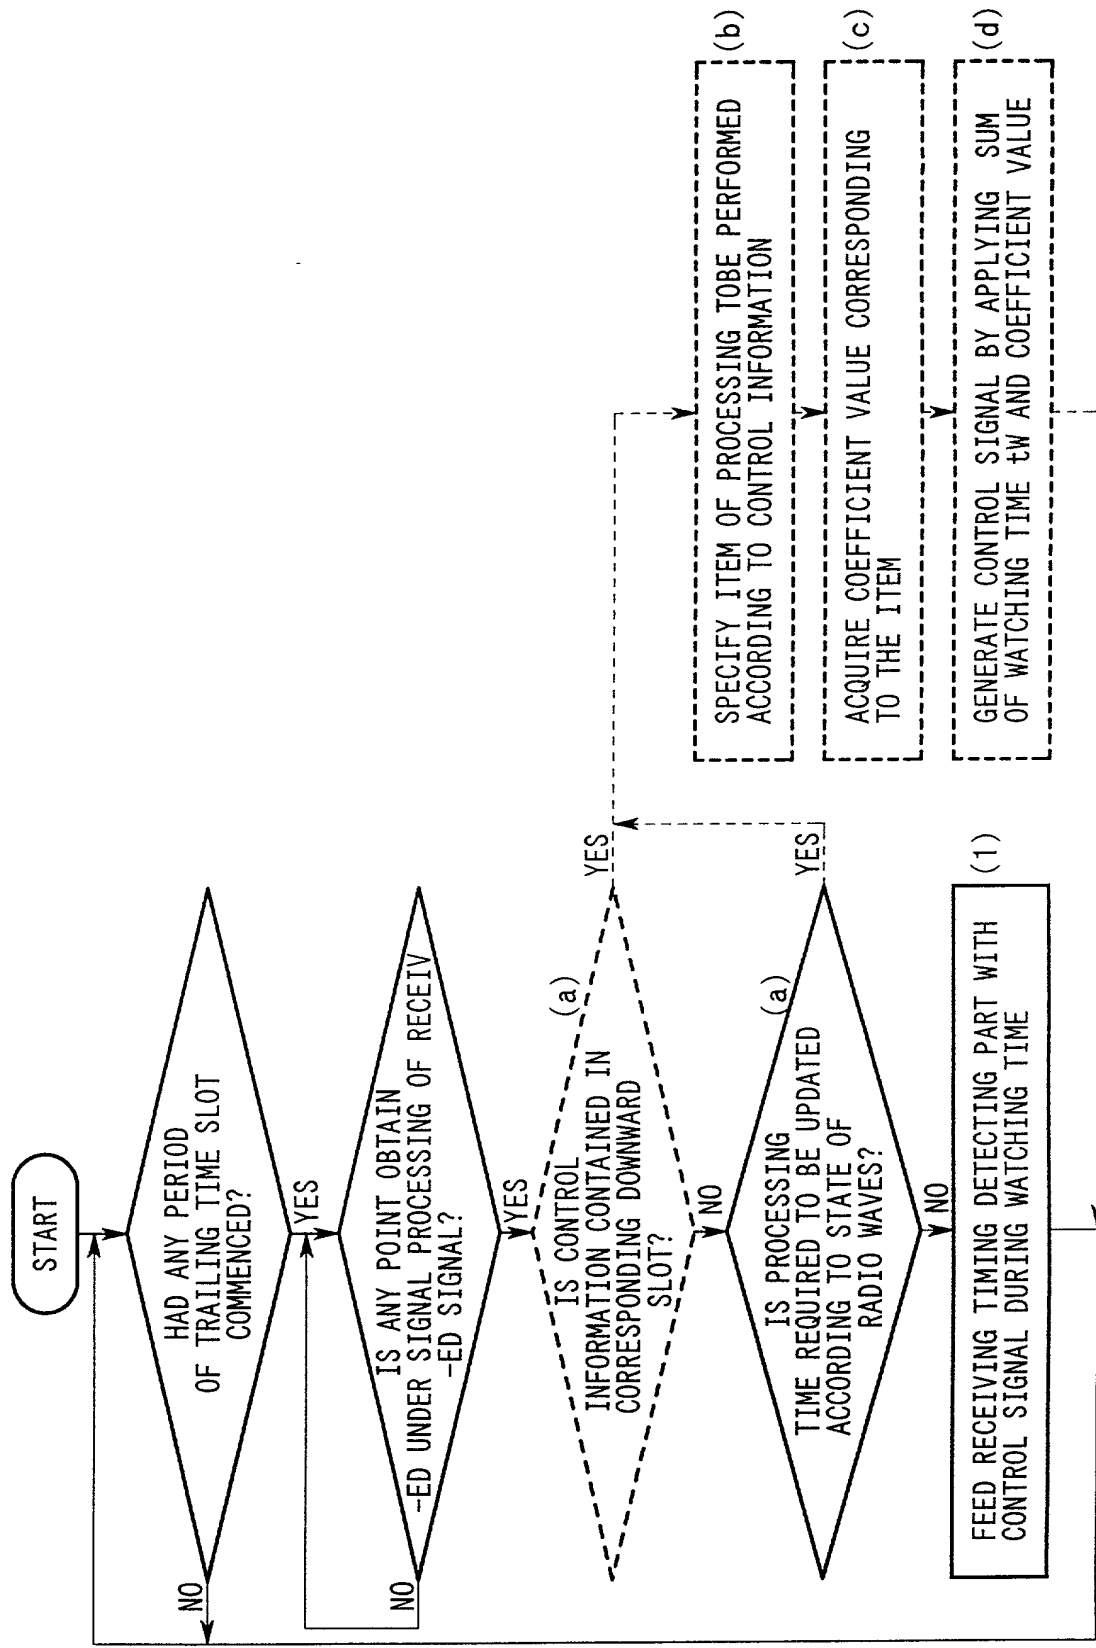


FIG. 5


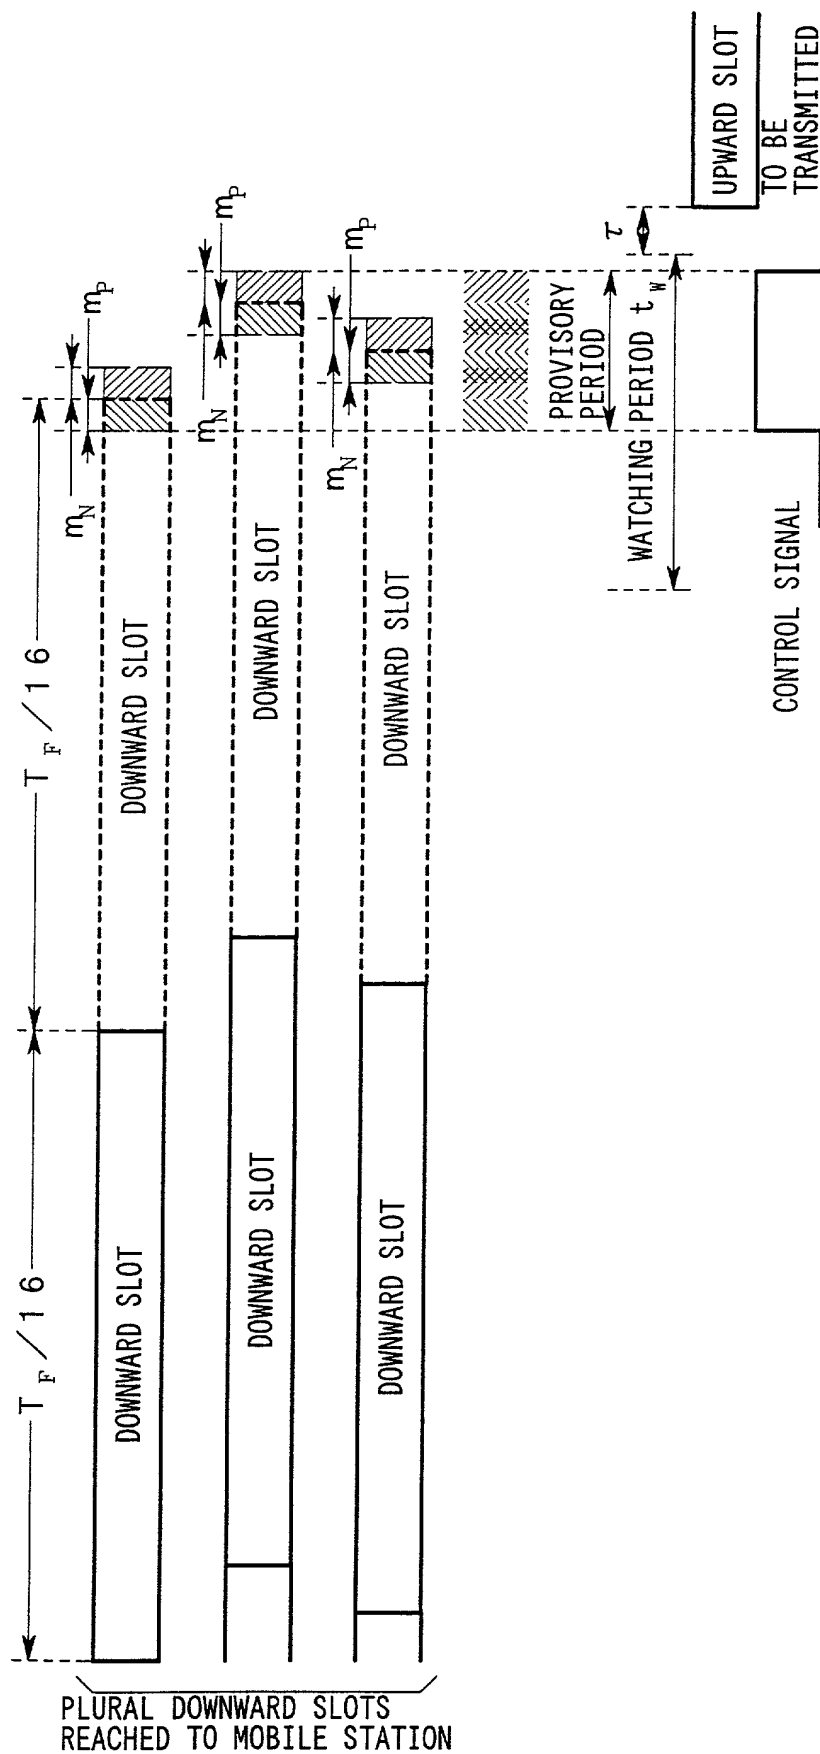


FIG. 6

PROCESSING IDENTIFIER ID _P	COEFFICIENT Δt	CONTROLLED OBJECT IDENTIFIER id _C	RESTRICTION PERIOD INFORMATION id _P
⋮	⋮	⋮	⋮

62 A、62 B

FIG. 7

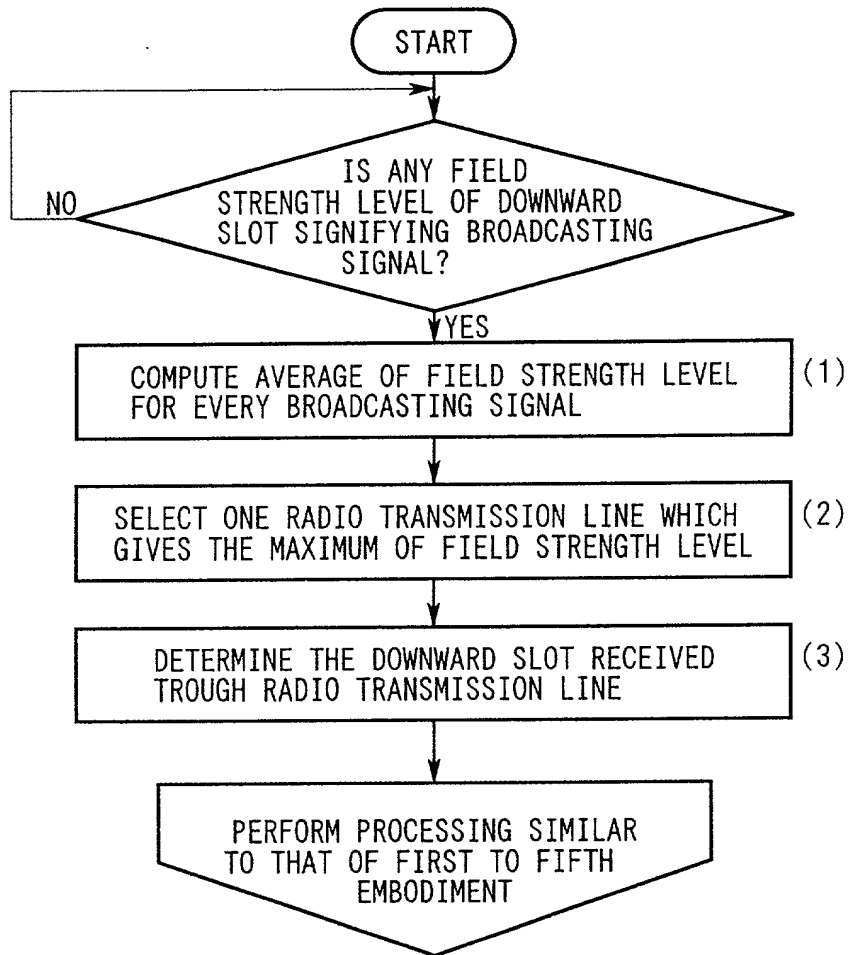

000000"4200T560

FIG. 8

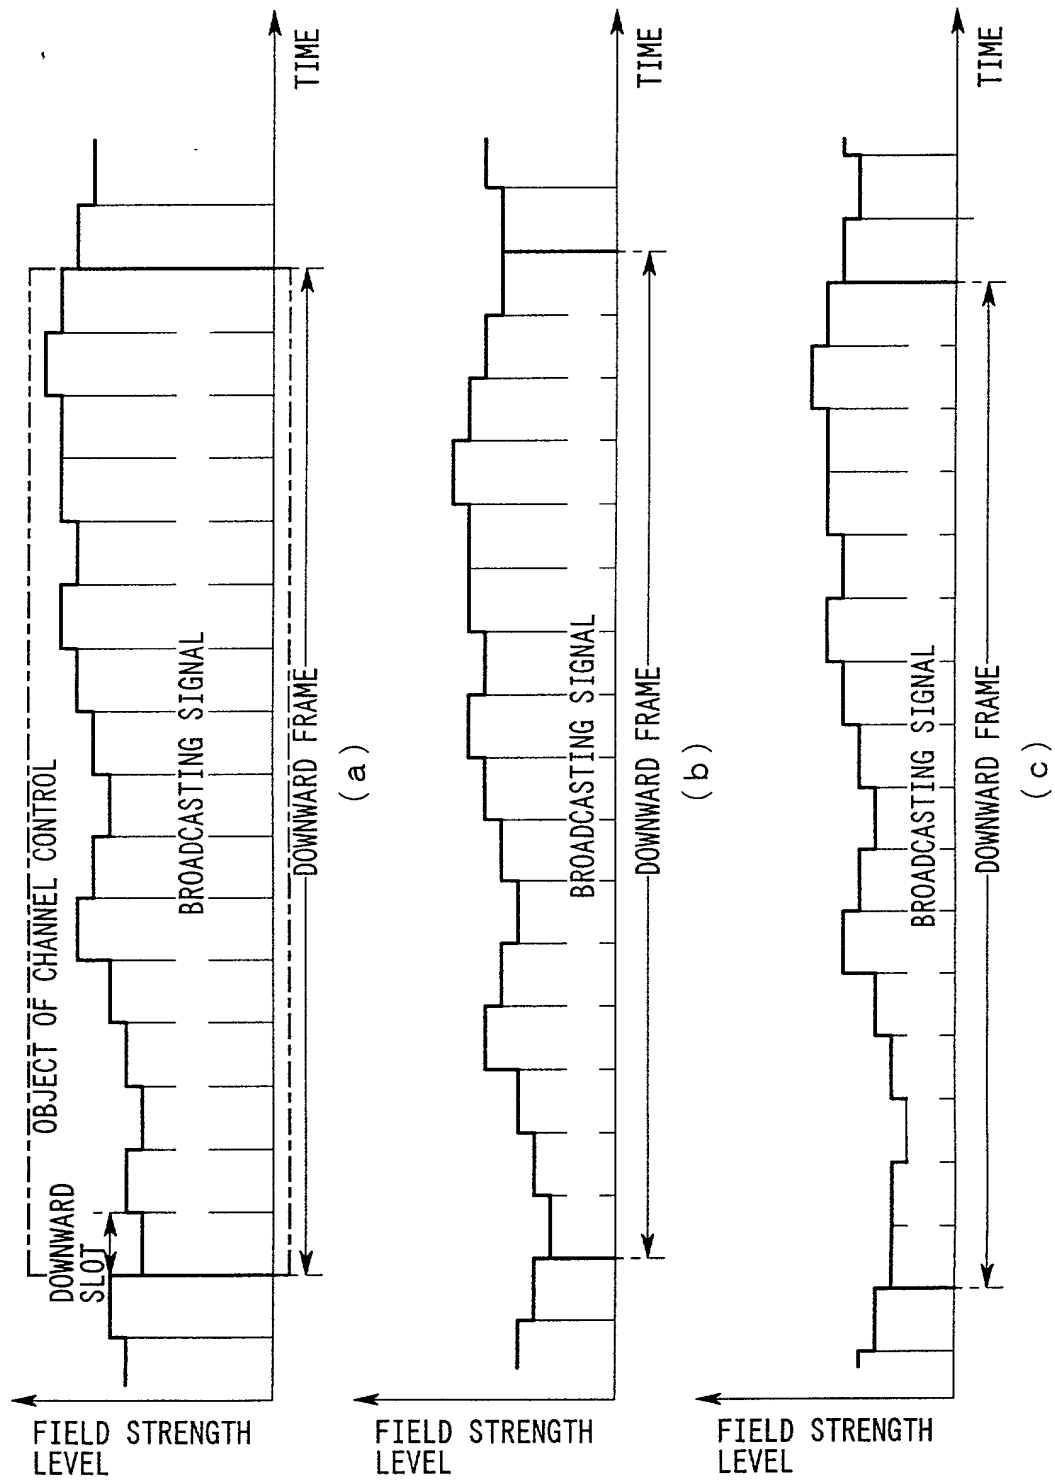


FIG. 9
PRIOR ART

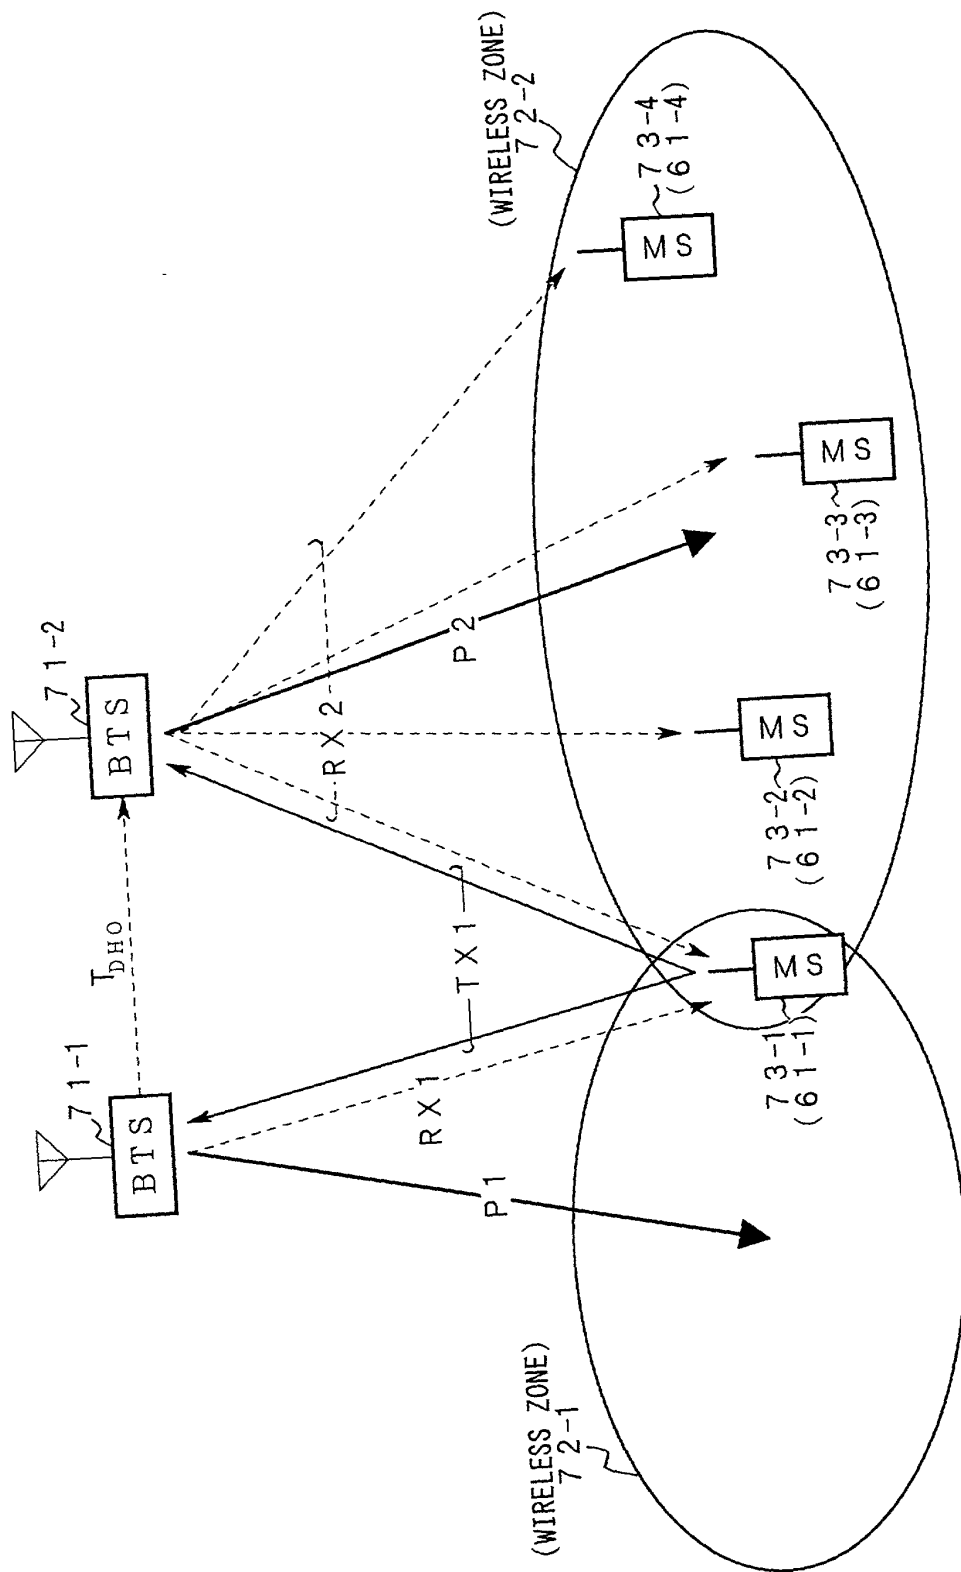


FIG. 11
PRIOR ART

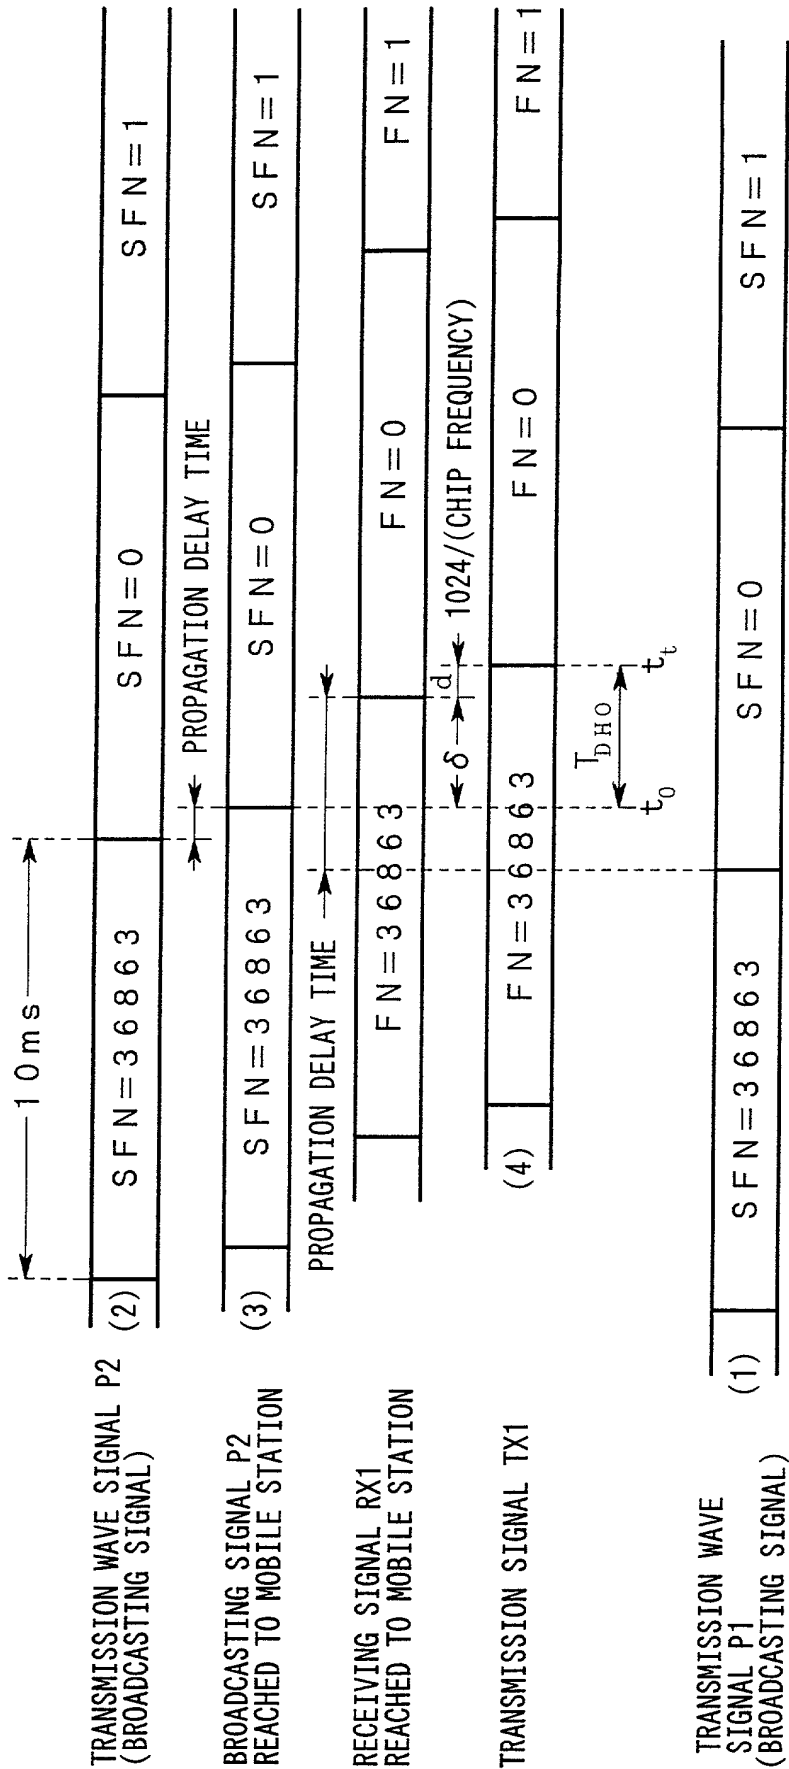


FIG. 12
PRIOR ART



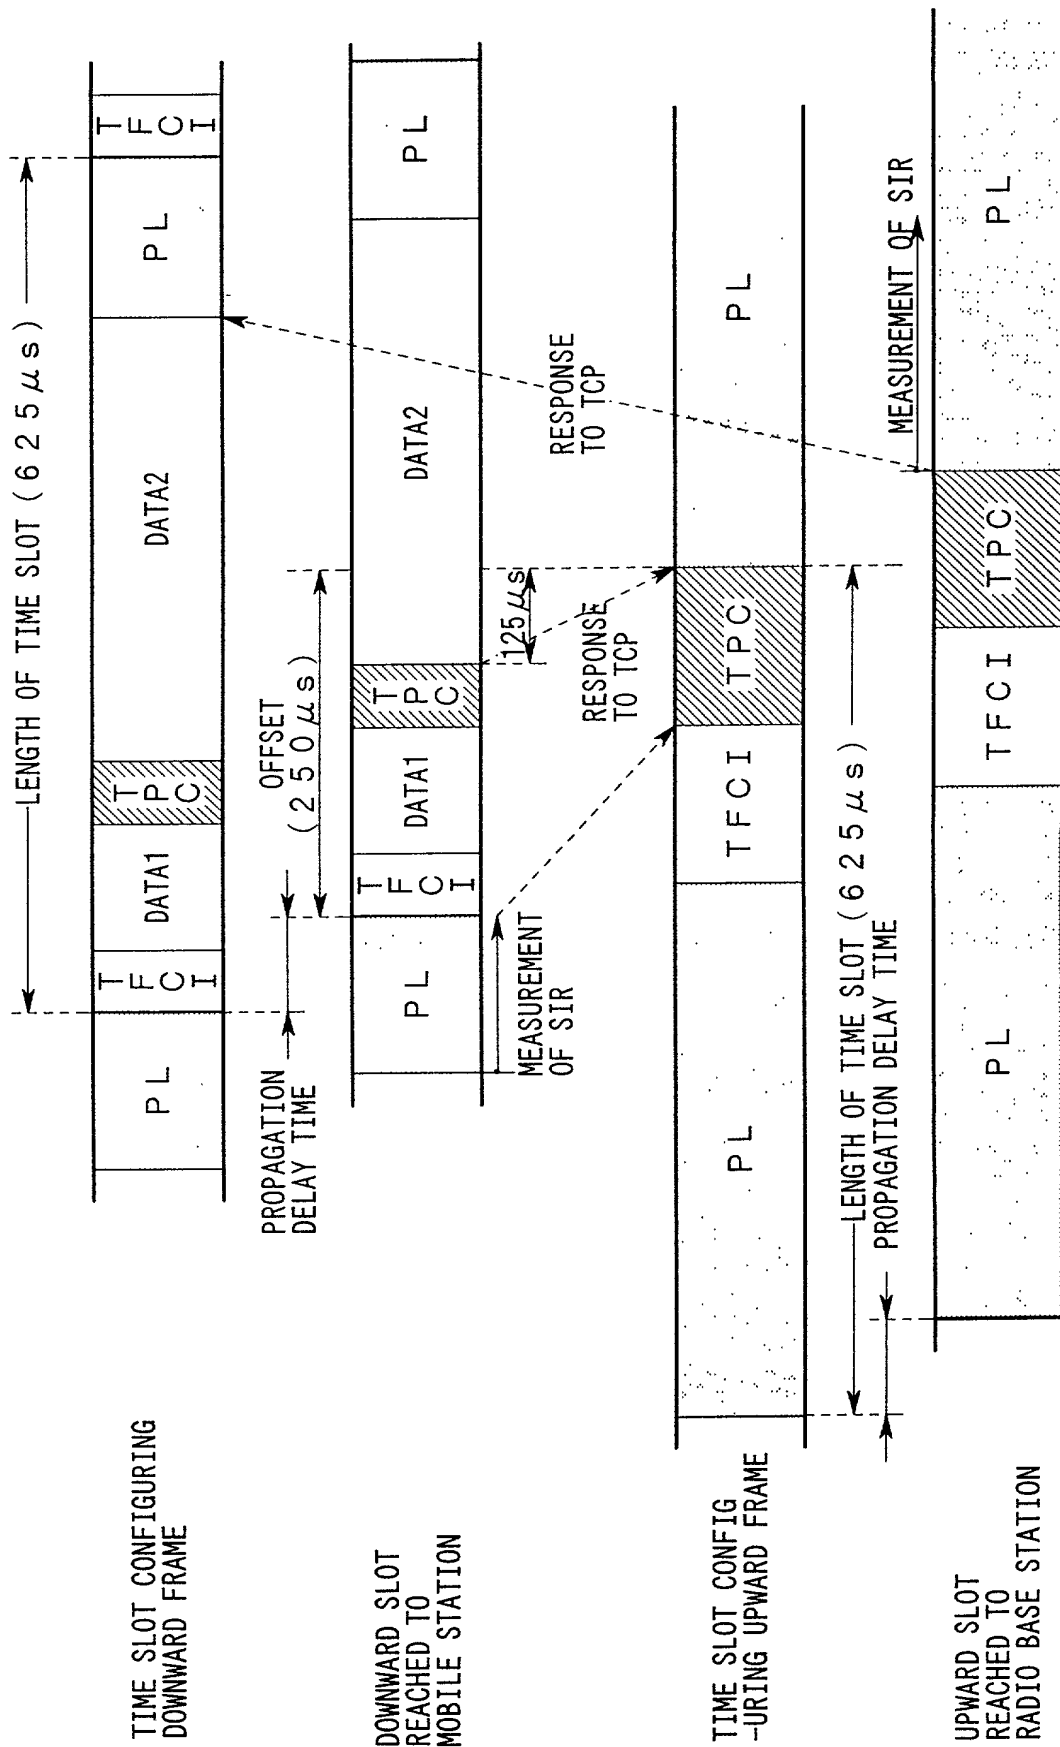


FIG. 13
PRIOR ART

DOWNWARD SLOT TRANSMITTED
BY RADIO BASE STATION 71-1



DOWNWARD SLOT TRANSMITTED
BY RADIO BASE STATION 71-2



Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RADIO TERMINAL EQUIPMENT

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
Heil-124398

JAPAN

(Number)
(番号)

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

30/04/1999

(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT,
Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625
Send Correspondence to:
HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor
	Nobuhisa Aoki
発明者の署名	Inventor's signature
日付	Date
	<i>Nobuhisa Aoki</i> Feb. 15, 2000
住所	Residence
	Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship
	JAPAN
私書箱 c/o FUJITSU LIMITED	Post Office Address
1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any
	Makoto Uchishima
第二共同発明者	Second inventor's signature
日付	Date
	<i>Makoto Uchishima</i> Feb. 15, 2000
住所	Residence
	Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship
	JAPAN
私書箱 c/o FUJITSU LIMITED	Post Office Address
1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Hiroaki Iwamoto		
第三共同発明者	日付	Third inventor's signature <i>Hiroaki Iwamoto</i>	Date Feb. 15, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan		
国 籍	Citizenship JAPAN		
私書箱	c/o FUJITSU LIMITED	Post Office Address 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	
第四共同発明者	Full name of fourth joint inventor, if any		
第四共同発明者	日付	Fourth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

第五共同発明者	Full name of fifth joint inventor, if any		
第五共同発明者	日付	Fifth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		
第六共同発明者	Full name of sixth joint inventor, if any		
第六共同発明者	日付	Sixth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第七以降の共同発明者についても同様に
記載し、署名をすること)

(Supply similar information and signature for
seventh and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: Nobuhisa AOKI et al.

Filed: : Concurrently herewith

For : RADIO TERMINAL EQUIPMENT

Serial No.: Concurrently herewith

February 22, 2000


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record
herein, do hereby grant a sub-power of attorney to Linda S.
Chan, Reg. No. 42,400, Jacqueline M. Steady, Reg. No., 44,354
and Harris A. Wolin, Reg. No. 39,432 to act and sign in my behalf
in the above-referenced application.

Respectfully submitted,

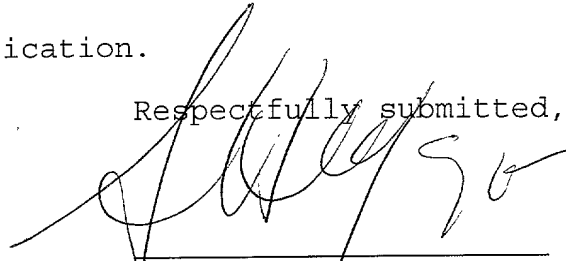
Samson Helfgott
Reg.No 23,072

HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.: FUJX17.079
LHH:power

Filed Via Express Mail

Rec. No.: EL522353697US

On: February 22, 2000

By: Lydia Gonzalez

Any fee due as a result of this paper, not covered
by an enclosed check may be charged on Deposit
Acct. No. 08-1634.

002320-4007560